

MTP-P&VE-F-63-9) OTS:
May 17, 1963

58

GEORGE C. MARSHALL

SPACE
FLIGHT
CENTER

HUNTSVILLE, ALABAMA

TMX 51104

NASA

PERFORMANCE ANALYSIS OF HIGH-
ENERGY CHEMICAL STAGES FOR
INTERPLANETARY MISSIONS.

PART II: BRAKE TO VENUS ORBIT

By

Walter H. Stafford and Sam H. Harlin

17 May 1963

ref

OTS PRICE

XEROX \$ 3.60 pb
MICROFILM \$ 1.40 mf.



NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

GEORGE C. MARSHALL SPACE FLIGHT CENTER

MTP-P&VE-F-63-9

PERFORMANCE ANALYSIS OF HIGH-ENERGY CHEMICAL
STAGES FOR INTERPLANETARY MISSIONS

PART II

BRAKE TO VENUS ORBIT

By

Walter H. Stafford and Sam H. Harlin

ABSTRACT

11300

The effect of earth thrust-to-weight ratios, and specific impulses on trajectory parameters has been investigated for braking to an orbit about Venus. The thrust vector was directed against the velocity vector in all instances. Specific impulses of 400 to 500 sec and earth thrust-to-weight ratios of 0.2 to 1.0 were used.

AUTHOR

GEORGE C. MARSHALL SPACE FLIGHT CENTER

MTP-P&VE-F-63-9

PERFORMANCE ANALYSIS OF HIGH-ENERGY CHEMICAL
STAGES FOR INTERPLANETARY MISSIONS

PART II

BRAKE TO VENUS ORBIT

By

Walter H. Stafford and Sam H. Harlin

FLIGHT OPERATIONS SECTION
ADVANCED FLIGHT SYSTEMS BRANCH
PROPULSION AND VEHICLE ENGINEERING DIVISION

TABLE OF CONTENTS

	Page
SUMMARY	1
SECTION I. INTRODUCTION.....	1
SECTION II. ASSUMPTIONS	2
SECTION III. ANALYSIS.....	2
SECTION IV. DISCUSSION OF RESULTS.....	5
SECTION V. CONCLUSIONS	5
SECTION VI. GRAPHIC PRESENTATION	6
BIBLIOGRAPHY.....	30

LIST OF ILLUSTRATIONS

Figure	Title	Page
1	Characteristic Velocity Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio as a Parameter for a Constant Specific Impulse of 400 Seconds	
	a. For Hyperbolic Excess Velocities of 0.0 through 4.6 km/sec	7
	b. For Hyperbolic Excess Velocities of 4.6 through 7.8 km/sec	8
	c. For Hyperbolic Excess Velocities of 7.8 through 10.0 km/sec.	9
2	Characteristic Velocity Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio as a Parameter for a Constant Specific Impulse of 425 Seconds	
	a. For Hyperbolic Excess Velocities of 0.0 through 4.6 km/sec	10
	b. For Hyperbolic Excess Velocities of 4.6 through 7.8 km/sec	11
	c. For Hyperbolic Excess Velocities of 7.8 through 10.0 km/sec.	12
3	Characteristic Velocity Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio as a Parameter for a Constant Specific Impulse of 450 Seconds	
	a. For Hyperbolic Excess Velocities of 0.0 through 4.6 km/sec	13
	b. For Hyperbolic Excess Velocities of 4.6 through 7.8 km/sec	14
	c. For Hyperbolic Excess Velocities of 7.8 through 10.0 km/sec.	15

LIST OF ILLUSTRATIONS (Continued)

Figure	Title	Page
4	Characteristic Velocity Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio as a Parameter for a Constant Specific Impulse of 475 Seconds	
	a. For Hyperbolic Excess Velocities of 0.0 through 4.6 km/sec	16
	b. For Hyperbolic Excess Velocities of 4.6 through 7.8 km/sec	17
	c. For Hyperbolic Excess Velocities of 7.8 through 10.0 km/sec.	18
5	Characteristic Velocity Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio as a Parameter for a Constant Specific Impulse of 500 Seconds	
	a. For Hyperbolic Excess Velocities of 0.0 through 4.6 km/sec	19
	b. For Hyperbolic Excess Velocities of 4.6 through 7.8 km/sec	20
	c. For Hyperbolic Excess Velocities of 7.8 through 10.0 km/sec.	21
6	Velocity Loss Due to Gravity Versus Thrust-to-Weight Ratio with Hyperbolic Excess Velocity as a Parameter for a Constant Specific Impulse of 400 Seconds.	22
7	Velocity Loss Due to Gravity Versus Thrust-to-Weight Ratio with Hyperbolic Excess Velocity as a Parameter for a Constant Specific Impulse of 500 Seconds.	23

LIST OF ILLUSTRATIONS (Concluded)

Figure	Title	Page
8	Flight Path Angle Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio for Specific Impulses of 400 and 500 Seconds as a Parameter	24
9	Change in Altitude Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio for Specific Impulses of 400 and 500 Seconds as a Parameter	25
10	Central Angle Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio for Specific Impulses of 400 and 500 Seconds as a Parameter	26
11	Burning Time Versus Hyperbolic Excess Velocity with Thrust-to-Weight Ratio for Specific Impulses of 400 and 500 Seconds as a Parameter	27
12	Mass Ratio Versus Characteristic Velocity with Specific Impulse as a Parameter.....	28
13	Payload Fraction and Stage Fraction Versus Mass Ratio with Stage Mass Fraction as a Parameter..	29

DEFINITION OF SYMBOLS

Symbol	Definition
F	Thrust, kp
F/W_o	Initial thrust-to-weight ratio (based on weight at earth sea level)
f	Stage mass fraction, W_p/W_A
g	Gravitational acceleration, m/sec ²
h	Altitude, km
Δh	Altitude change, $h - h_o$, km
H	Energy
I_{sp}	Specific impulse, sec
m	Mass, $\frac{kp \cdot sec^2}{m}$
r	Radius, km
r_o	$h_o + r_Q$, km
t_B	Burning time, sec
V	Velocity
V^*	Comparative velocity
V_1	Stage characteristic velocity
V_∞	Hyperbolic excess velocity
W_A	Stage weight, $W_o - W_L$, kp
W_L	Payload weight, kp
W_o	Gross weight, kp
W_p	Propellant weight, kp
X	Surface range, km
α	Angle of attack (angle between velocity vector and thrust vector), deg
ζ	Propellant mass fraction, W_p/W_o

DEFINTION OF SYMBOLS (Concluded)

Symbol	Definition
α	Flight path angle from vertical, deg
μ	Gravitational constant for Venus, $324306.2 \text{ km}^3/\text{sec}^2$
ψ	Central angle, deg
Subscripts	
C	Burnout
ex	Exhaust
f	Final
id	Ideal
K	Circular
o	Initial
P	Propellant
V	Venus
Abbreviations	
km	Kilometer
kp	Kilopond
m	Meter
sec	Second

GEORGE C. MARSHALL SPACE FLIGHT CENTER

MTP-P&VE-F-63-9

PERFORMANCE ANALYSIS OF HIGH-ENERGY CHEMICAL
STAGES FOR INTERPLANETARY MISSIONS

PART II

BRAKE TO VENUS ORBIT

By

Walter H. Stafford and Sam H. Harlin

SUMMARY

The effect of earth thrust-to-weight ratios, and specific impulses on trajectory parameters has been investigated for braking to an orbit about Venus. The thrust vector was directed against the velocity vector in all instances. Specific impulses of 400 to 500 sec and earth thrust-to-weight ratios of 0.2 to 1.0 were used.

SECTION I. INTRODUCTION

Preliminary mission analysis for planning the exploration of Venus requires a sufficiently accurate and rapid method for determining the trajectory parameters. The purpose of this study is to present a method for determining these parameters for powered braking into an orbit about Venus when the arrival hyperbolic excess velocity is known.

The approach used was to determine the arrival velocity for a given transfer trajectory and initiate burning so that circular orbit conditions are attained at burnout. The equations of motion were integrated on a RECOMP II computer, using a Runge-Kutta numerical integration procedure.

SECTION II. ASSUMPTIONS

The following is a summary of the basic assumptions used in this study:


1. Deceleration of a single stage from an interplanetary transfer trajectory to a 600-km circular Venusian orbit, using a constant thrust directed against the velocity vector.
2. Constant specific impulse values:
 - a. 400 sec
 - b. 425 sec
 - c. 450 sec
 - d. 475 sec
 - e. 500 sec
3. The earth thrust-to-weight ratio for a chemical stage was varied parametrically from 0.2 to 1.0.
4. Mean spherical planet Venus:
 $\mu = 324306.2 \text{ km}^3/\text{sec}^2$
 $r = 6123.0 \text{ km}$

SECTION III. ANALYSIS

In Venusian mission programs, it is assumed that one mode of flight will be by way of a transfer from a circular orbit around Venus. In general, a spacecraft will approach the vicinity of Venus with a relative hyperbolic flight velocity.

The velocity requirements for injection into a 600-km circular orbit from an interplanetary transfer trajectory were calculated using the equations of motion for a vehicle flying into orbit with an angle of attack of 180 degrees.

Referring to the sketch below, computations were made for a point mass moving in a plane using the following equations of motion:

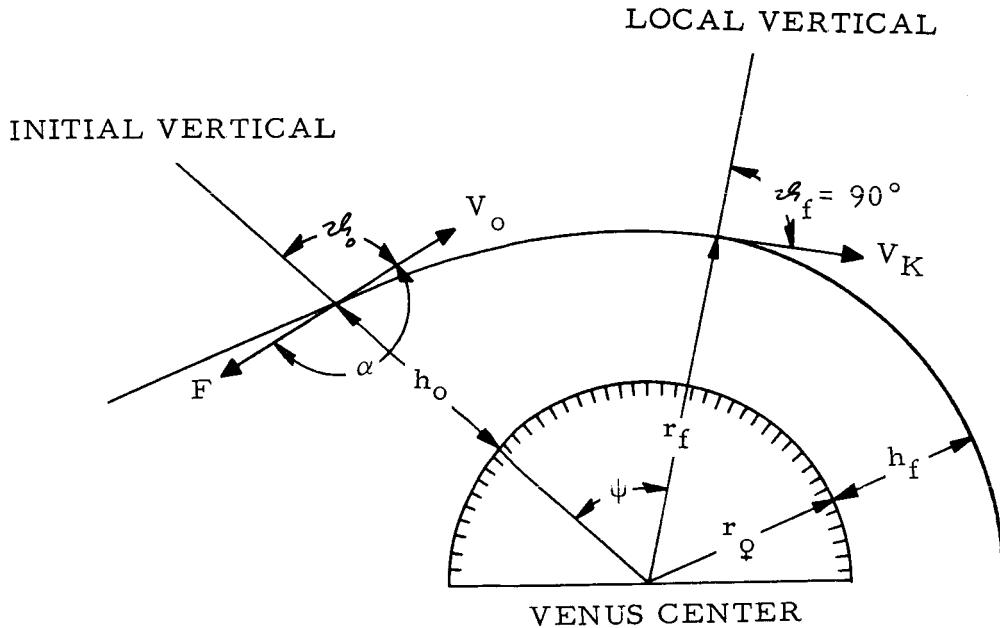

$$\dot{V} = \frac{F \cos \alpha}{m} - \frac{\mu_{\oplus}}{r^2} \cos \theta \quad (1)$$

$$V \dot{\theta} = \frac{F \sin \alpha}{m} + \left(\frac{\mu_{\oplus}}{r^2} - \frac{V^2}{r} \right) \sin \theta \quad (2)$$

$$\dot{r} = V \cos \theta \quad (3)$$

$$\dot{\psi} = \frac{V \sin \theta}{r} \quad (4)$$

where

$$m = m_o + \int \dot{m} dt \quad (5)$$

and

$$\dot{m} = - \frac{F}{V_{ex}} \quad (6)$$

The velocity and flight path angle may be obtained by integrating the equation of motion

$$V = V_0 + \int \dot{V} dt \quad (7)$$

$$\vartheta = \vartheta_0 + \int \dot{\vartheta} dt \quad (8)$$

The range and altitude can then be calculated by the relations

$$X = X_0 + \int \frac{r_Q}{r} V \sin \vartheta dt \quad (9)$$

$$h = h_0 + \int \dot{r} dt \quad (10)$$

and the central angle is

$$\psi = \psi_0 + \int \frac{\dot{X}}{r_Q} dt \quad (11)$$

The initial weight of the vehicle is

$$W_0 = W_C + W_P \quad (12)$$

The velocity expended by a vehicle is the characteristic velocity, or

$$V_1 = V_{ex} \ln \left(\frac{1}{1 - \zeta} \right) \quad (13)$$

Then the velocity losses are the difference between the characteristic velocity and the change in comparative velocity, or

$$V_{loss} = V_1 - \Delta V^* \quad (14)$$

where the comparative velocity is

$$V^* = \sqrt{V^2 + 2\mu_Q \left(\frac{1}{r} - \frac{1}{r_Q} \right)} \quad (15)$$

The change in comparative velocity during descent from $r = r_o$ to $r = r_f$ is

$$\Delta V^* = \sqrt{V_o^2 + 2\mu_Q \left(\frac{1}{r_f} - \frac{1}{r_o} \right)} - V_f \quad (16)$$

and the velocity loss due to gravity is

$$V_{loss} = V_{ex} \ln \left(\frac{1}{1 - \xi} \right) - \left[\sqrt{V_o^2 + 2\mu_Q \left(\frac{1}{r_f} - \frac{1}{r_o} \right)} - V_f \right] \quad (17)$$

SECTION IV. DISCUSSION OF RESULTS

The results of this investigation are shown in Figures 1 through 13. The characteristic velocity, V_1 , is plotted versus hyperbolic excess velocity with earth thrust-to-weight ratios as a parameter in Figures 1 through 5.

Figures 6 and 7 show the velocity losses due to gravity for specific impulse values of 400 sec and 500 sec respectively. These losses tend to zero as the earth thrust-to-weight ratio is increased. The flight path angle at initiation of burning prior to Keplerian pericenter is shown in Figure 8.

Figure 9 shows the change in altitude. This change is the difference between the altitude at initiation of burning and the altitude of the circular orbit about Venus. The change in other trajectory parameters is shown in Figures 10 and 11. The vehicle mass characteristic can be determined from Figures 12 and 13.

SECTION V. CONCLUSIONS

From this parametric analysis, sufficient data are presented to enable the designer to make a preliminary design of a stage for braking into an orbit about Venus when the mission requirements are defined.

SECTION VI. GRAPHIC PRESENTATION

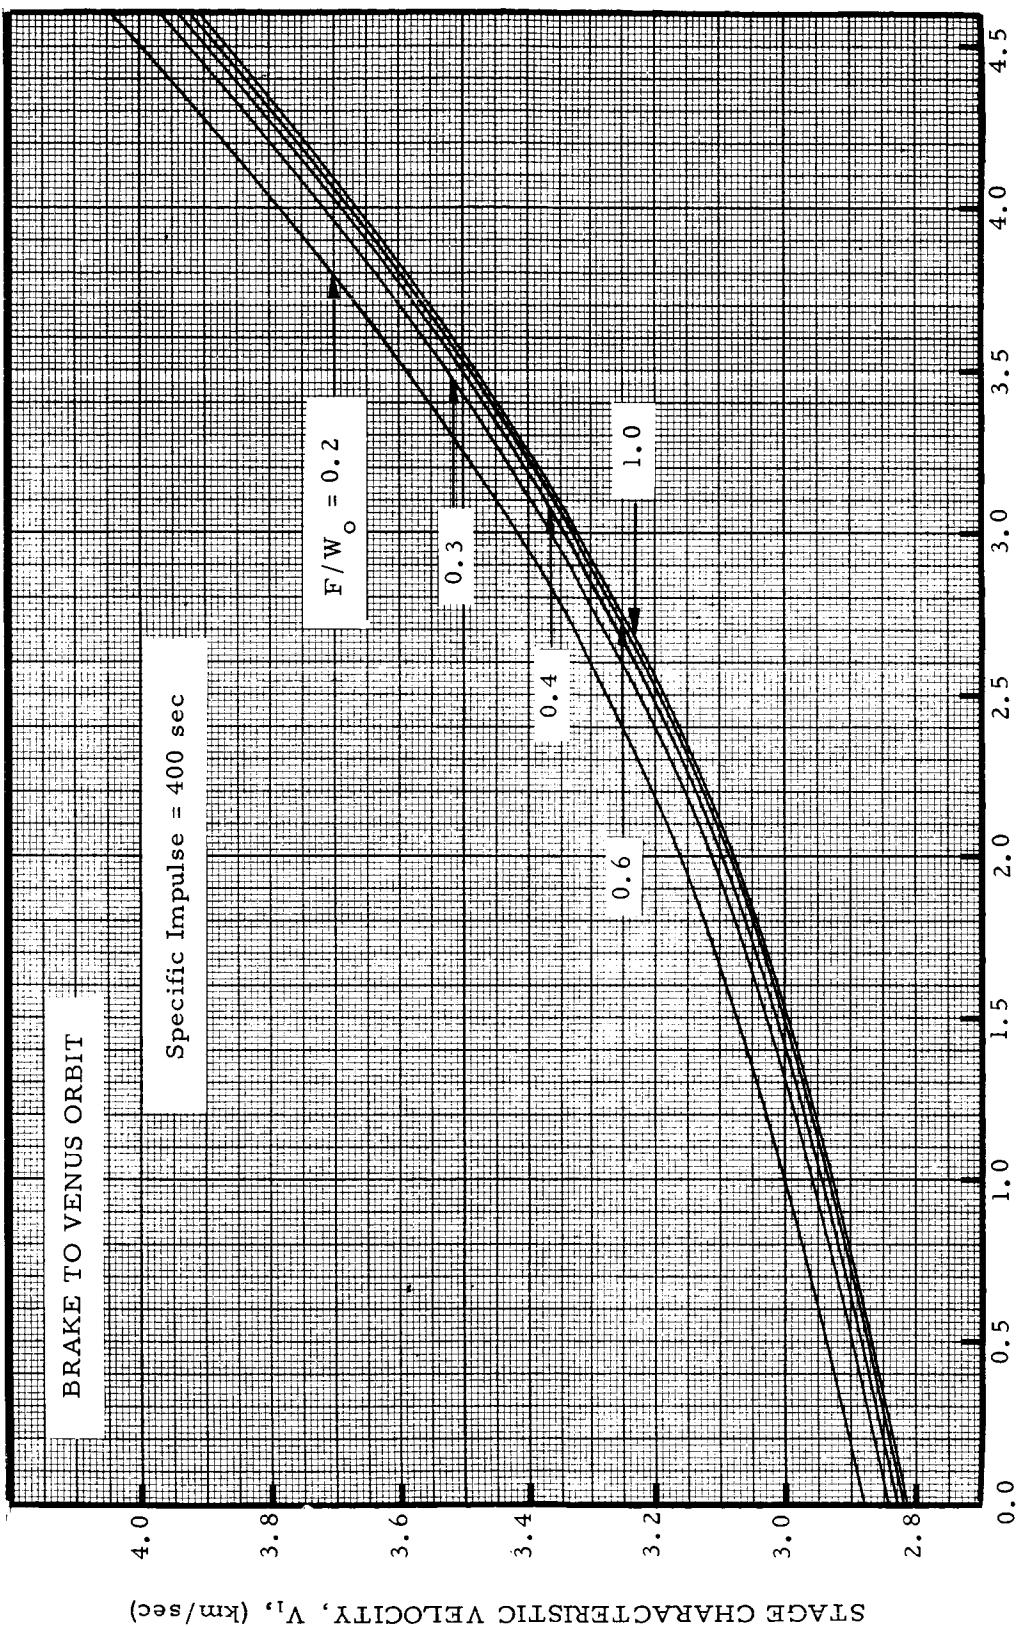


FIGURE 1a. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 400 SECONDS

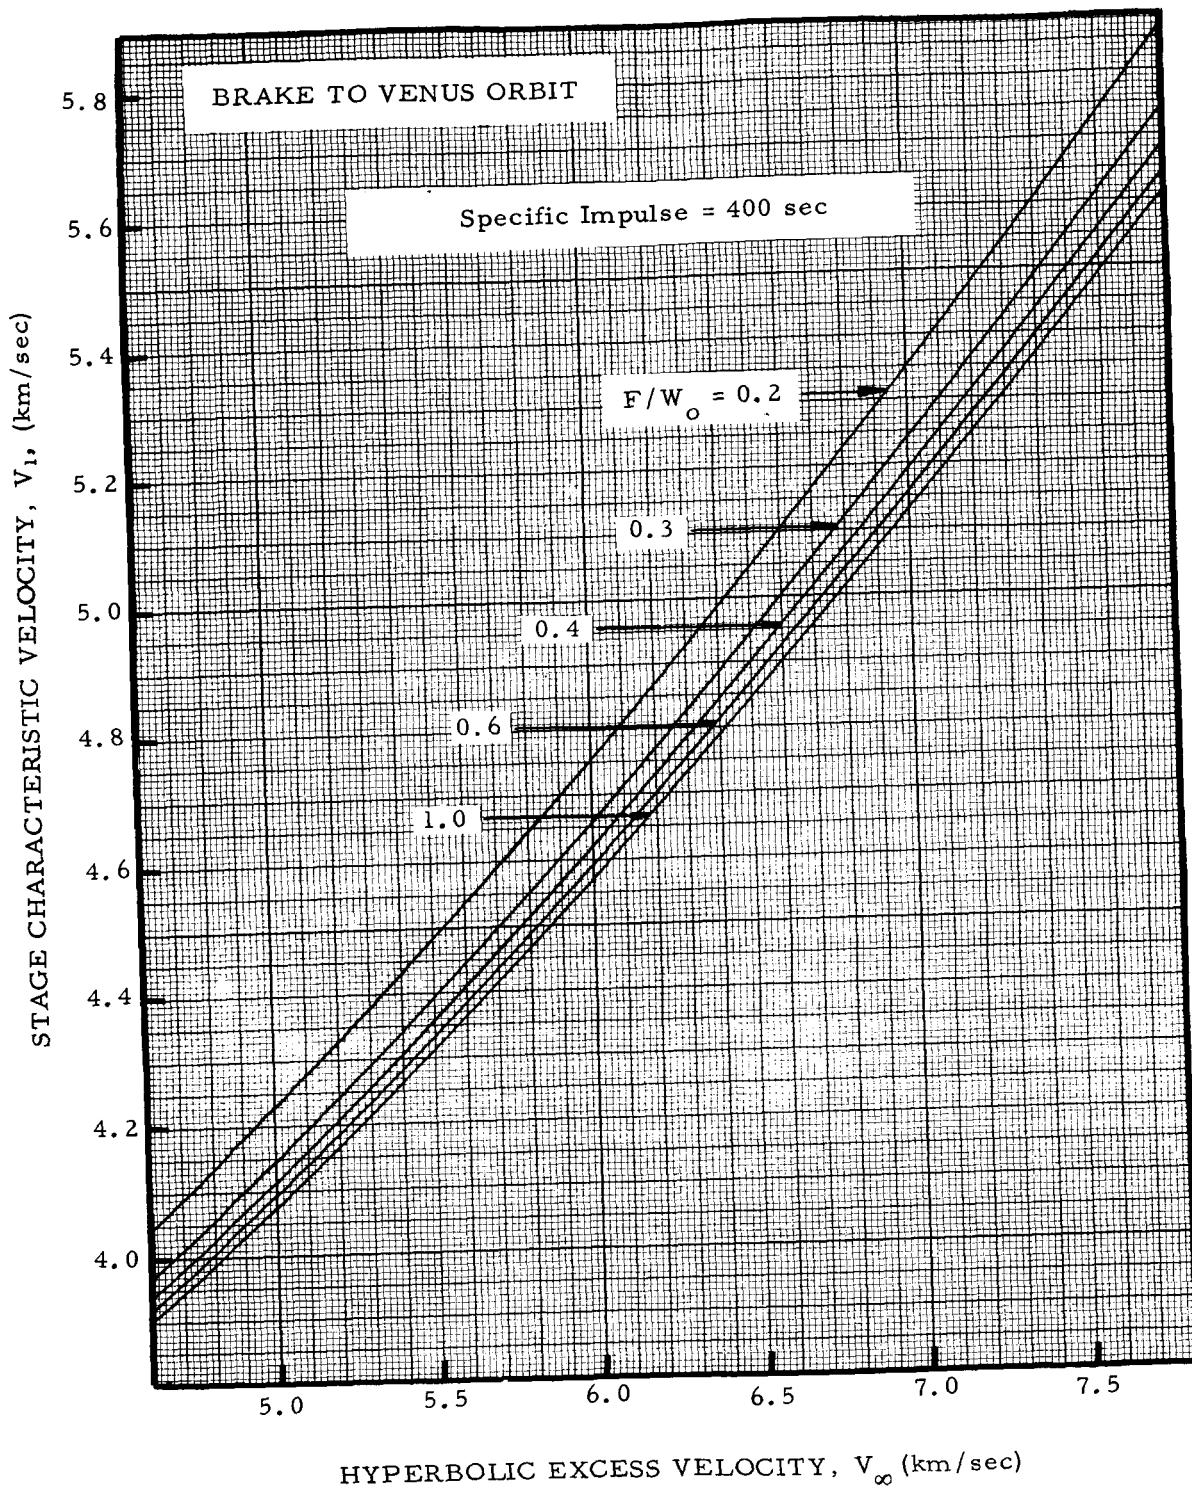


FIGURE 1b. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 400 SECONDS

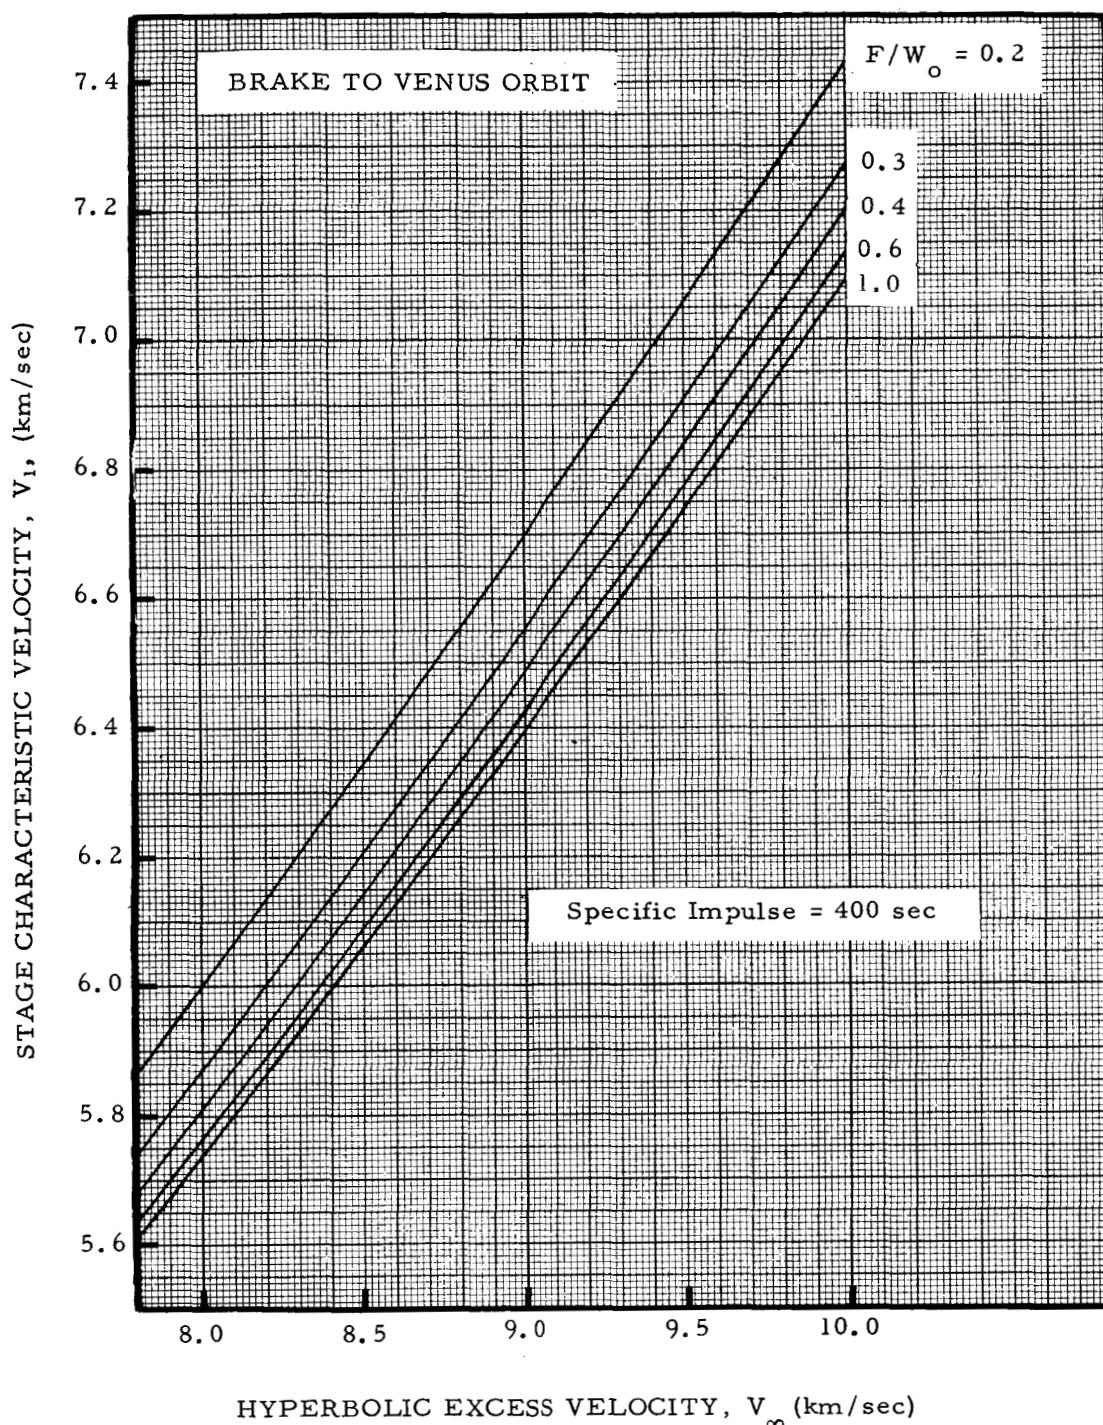


FIGURE 1c. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 400 SECONDS

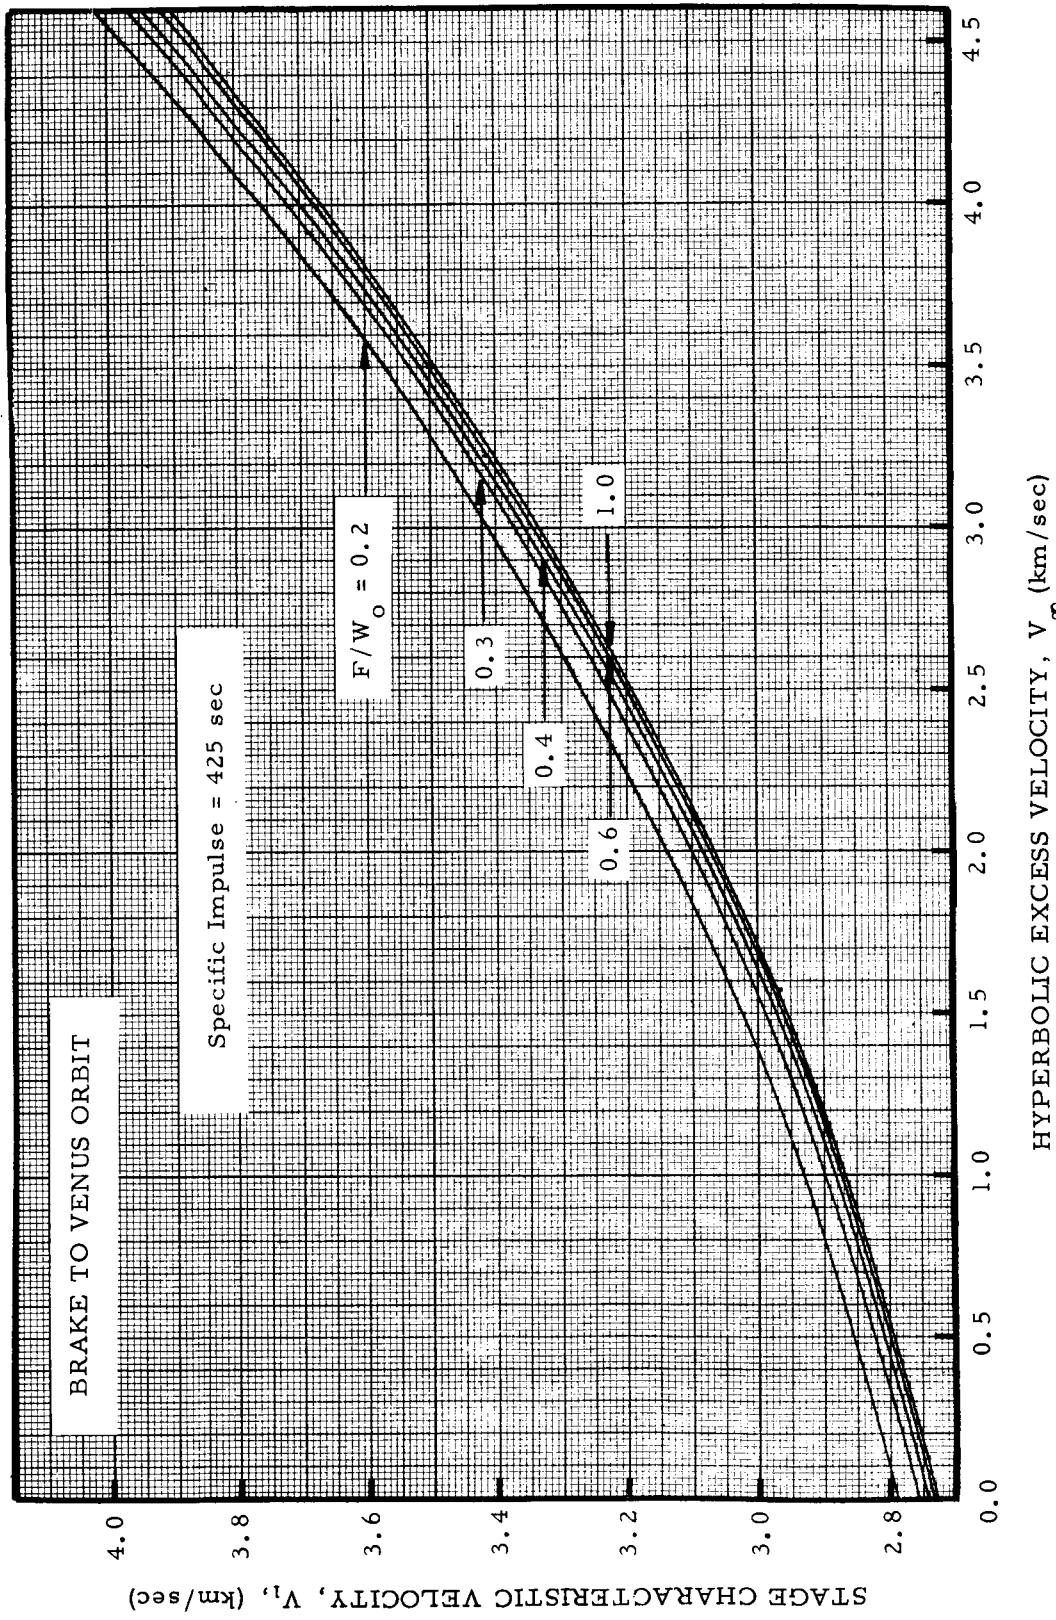


FIGURE 2a. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 425 SECONDS

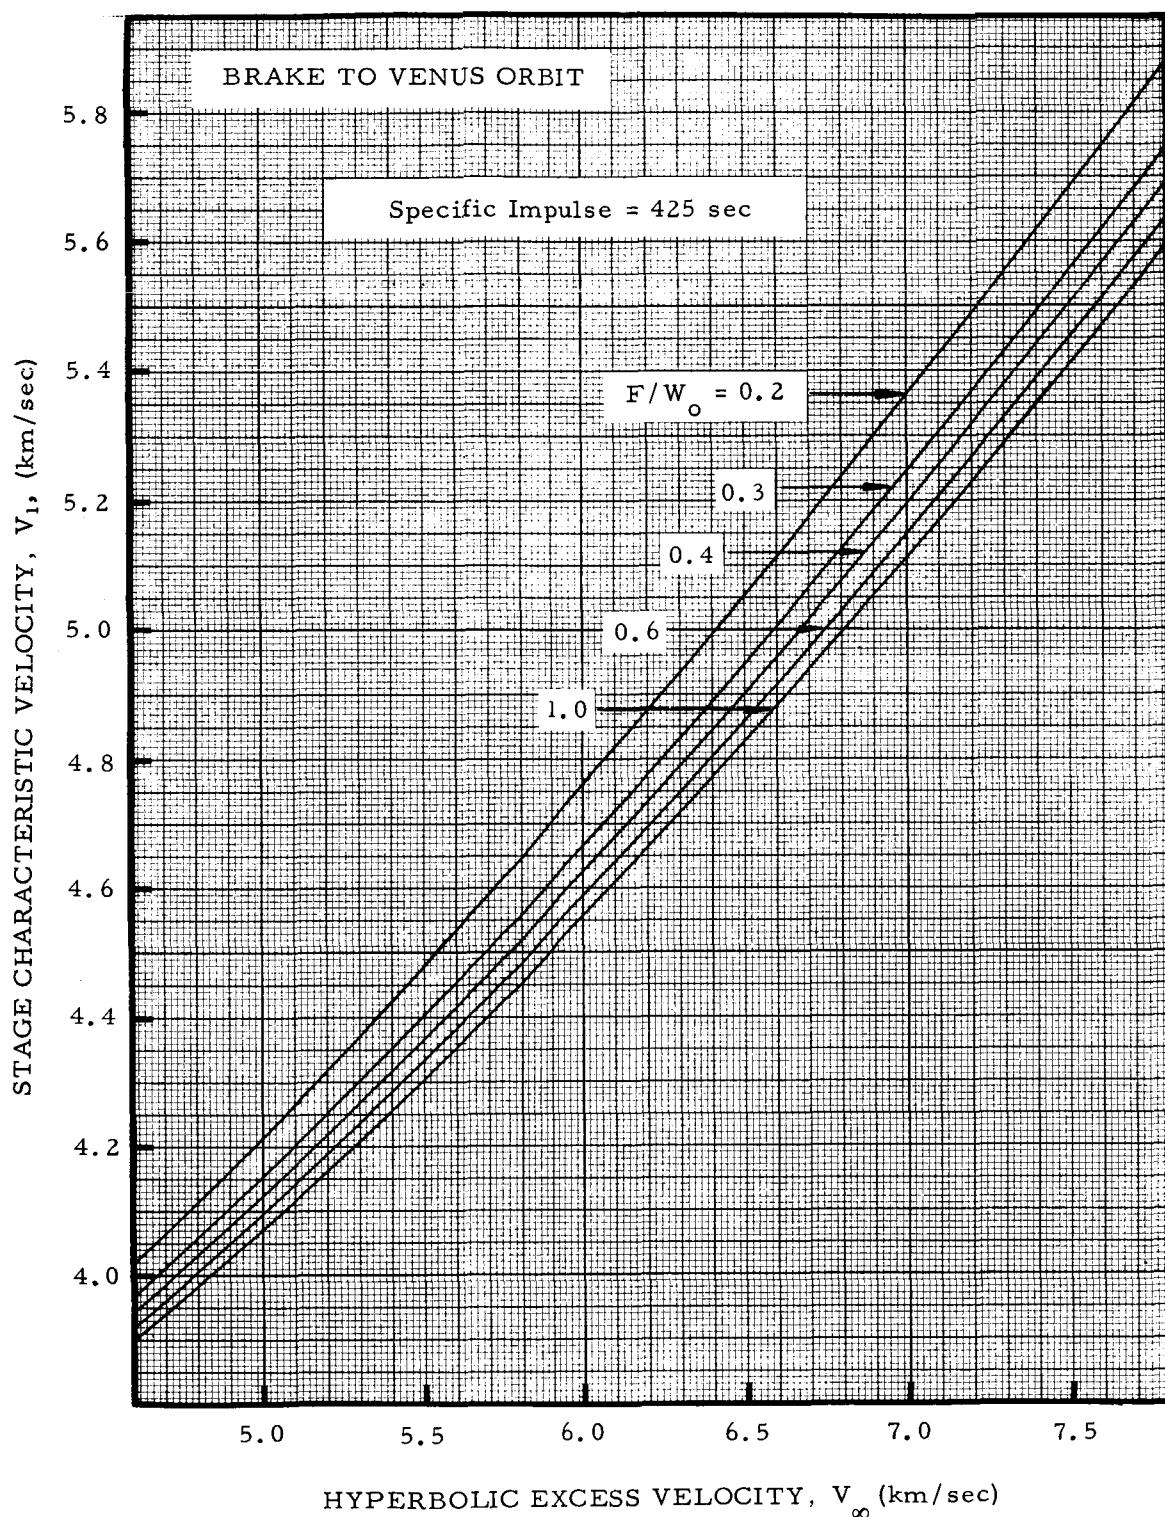


FIGURE 2b. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_{∞} (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 425 SECONDS

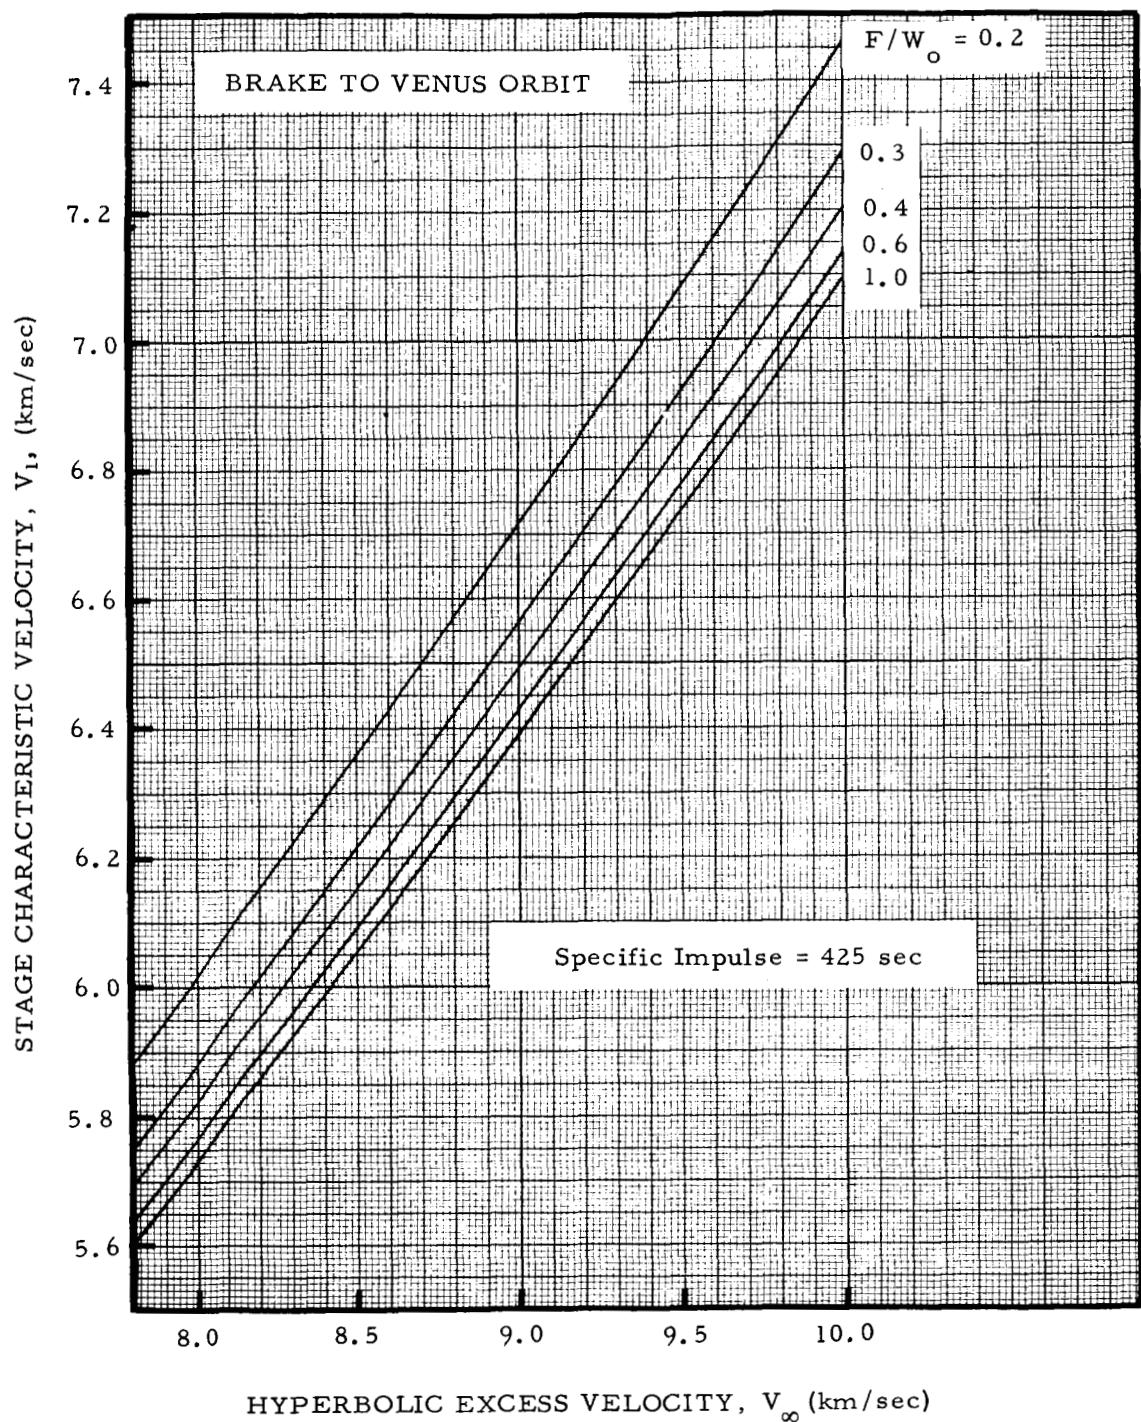


FIGURE 2c. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 425 SECONDS

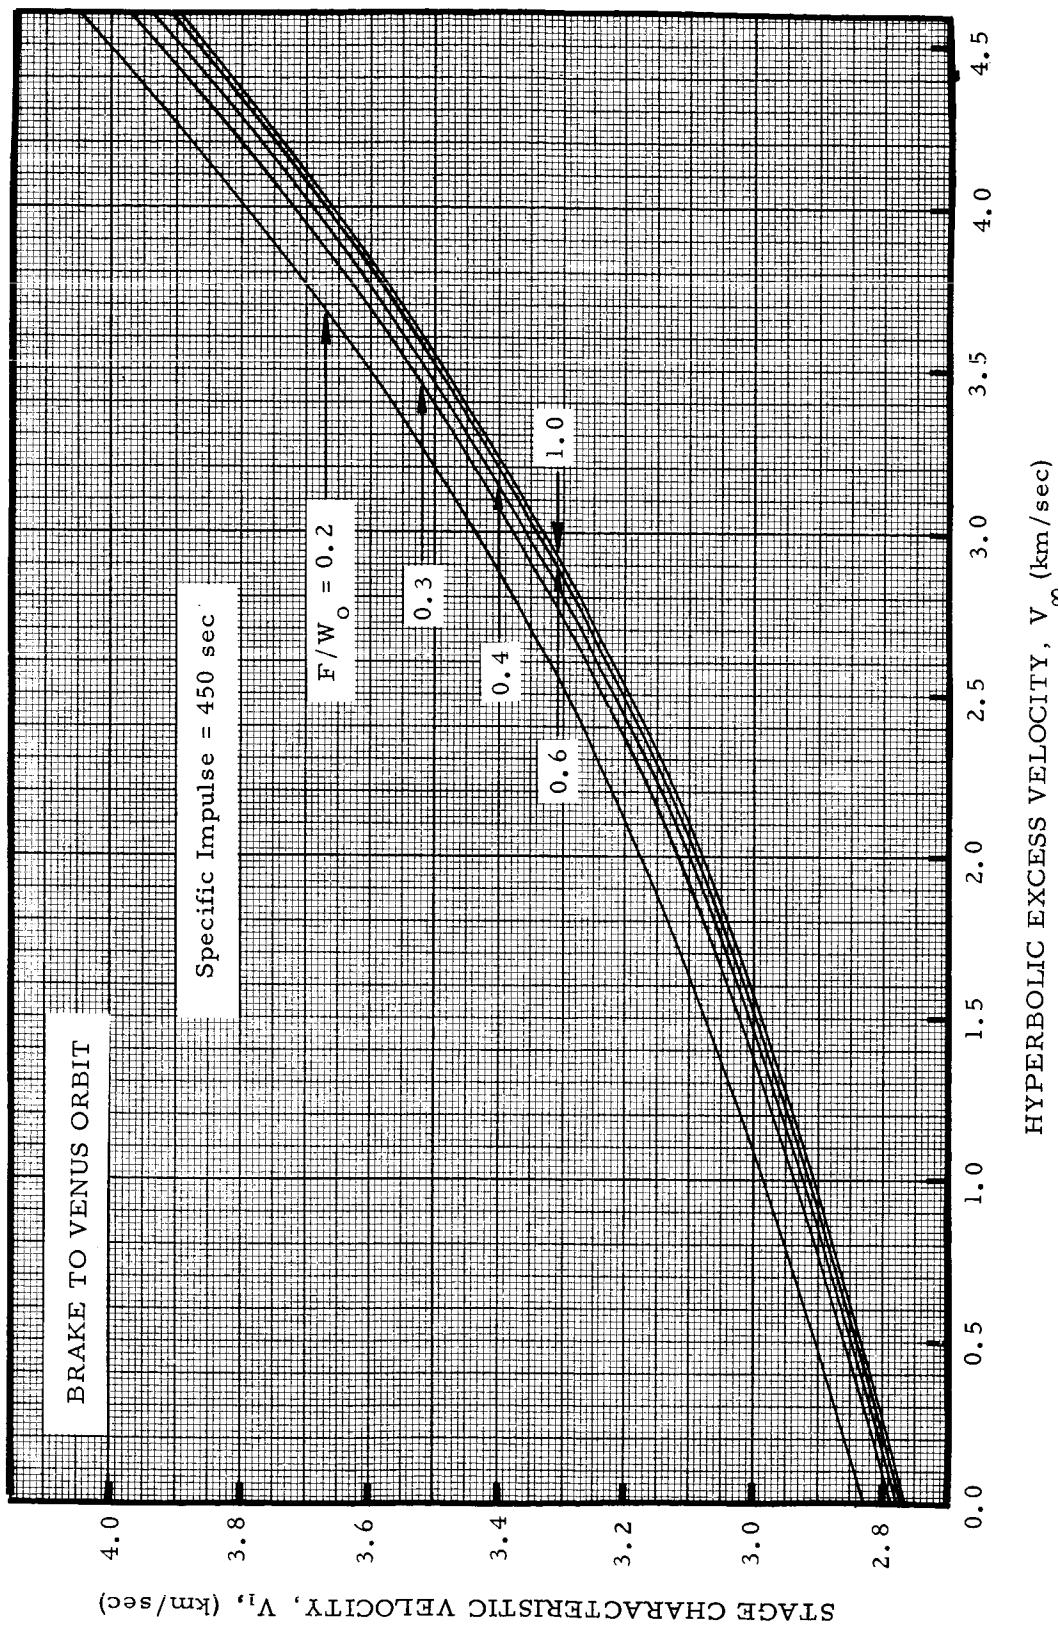


FIGURE 3a. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 450 SECONDS

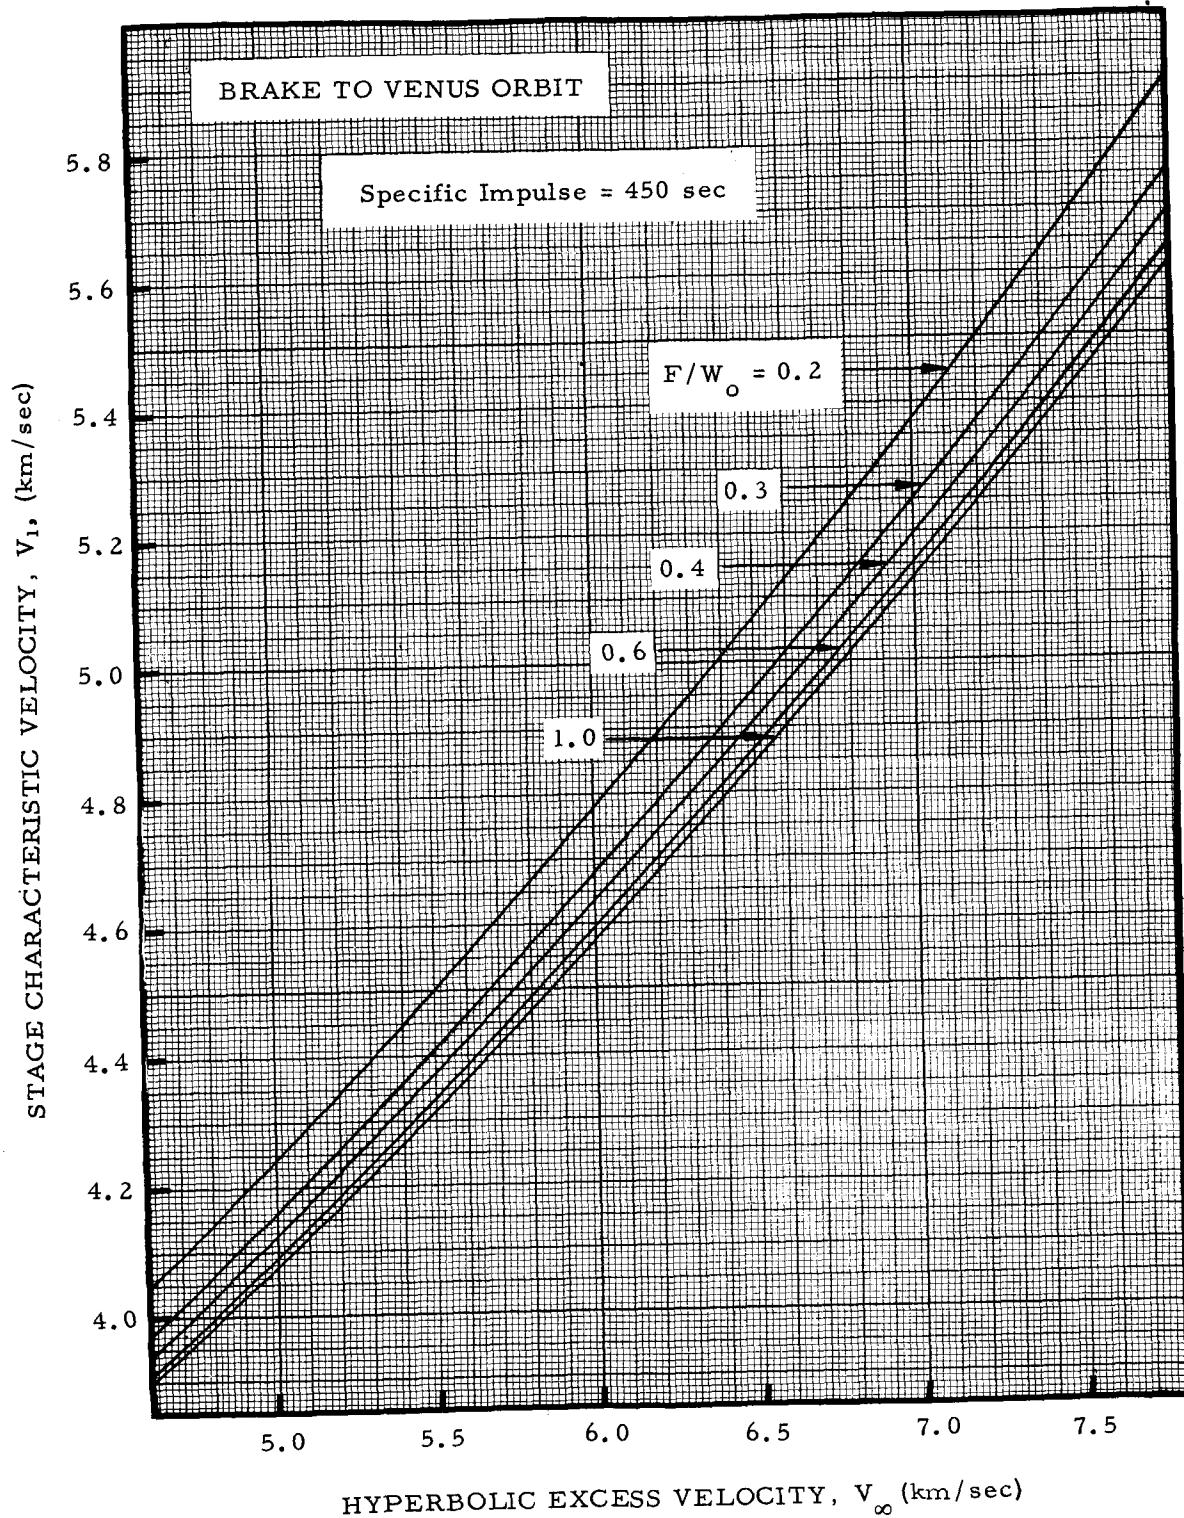


FIGURE 3b. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 450 SECONDS

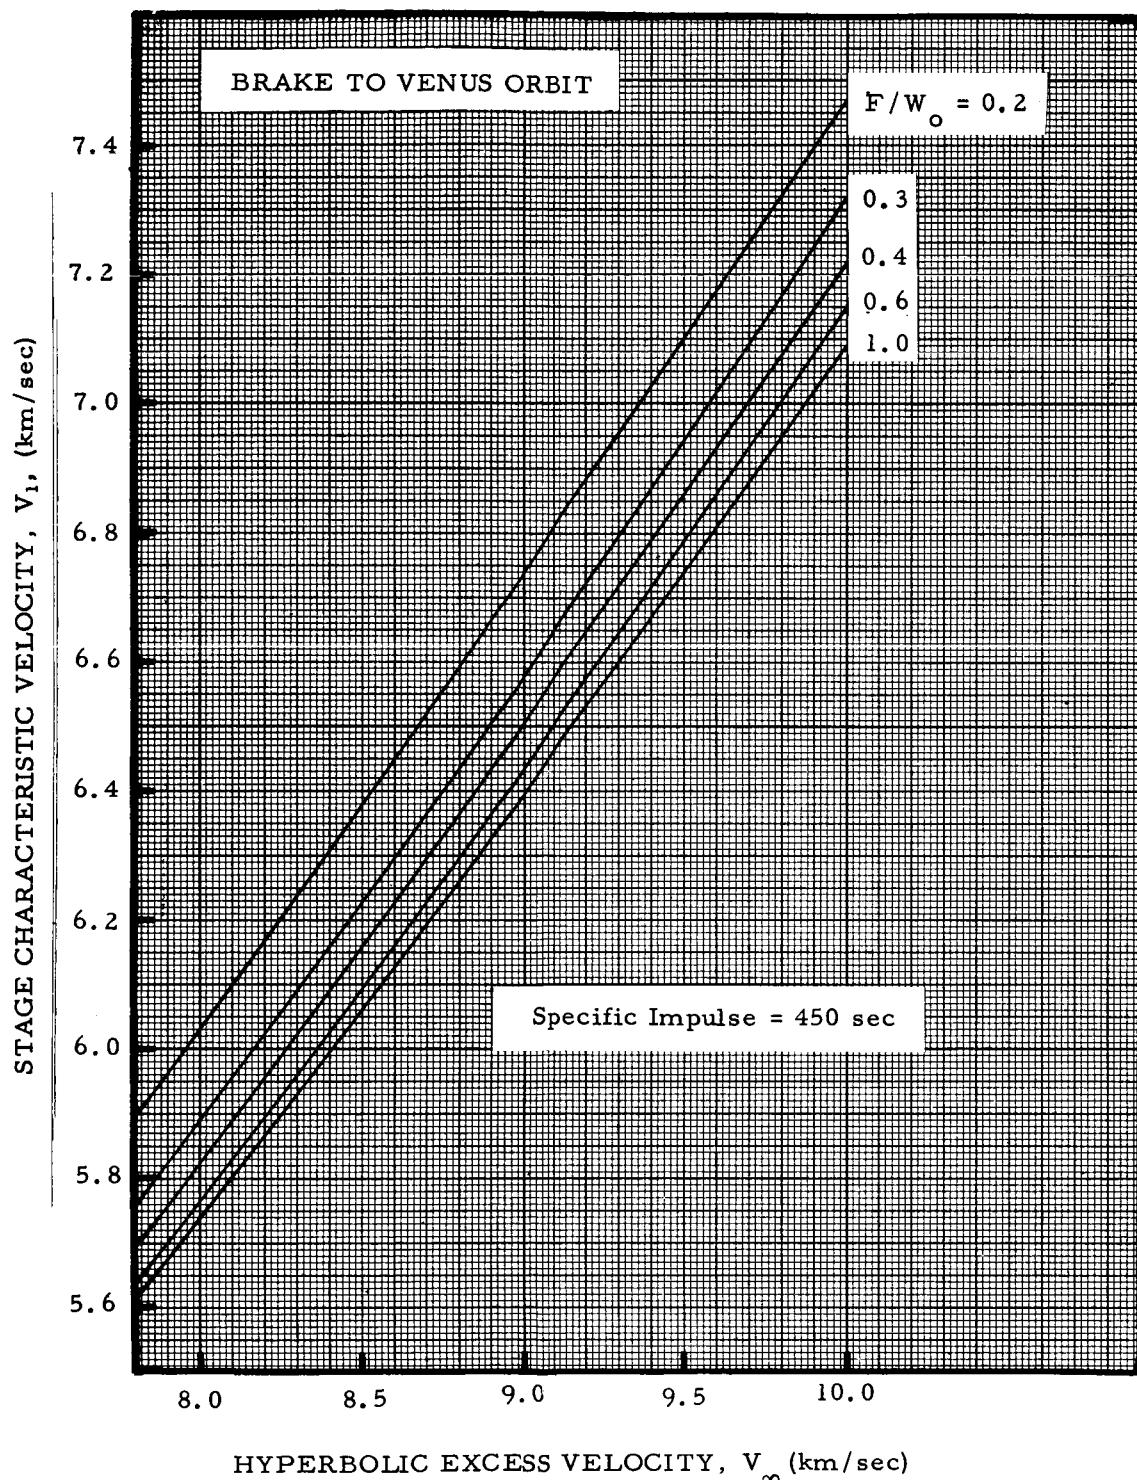


FIGURE 3c. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 450 SECONDS

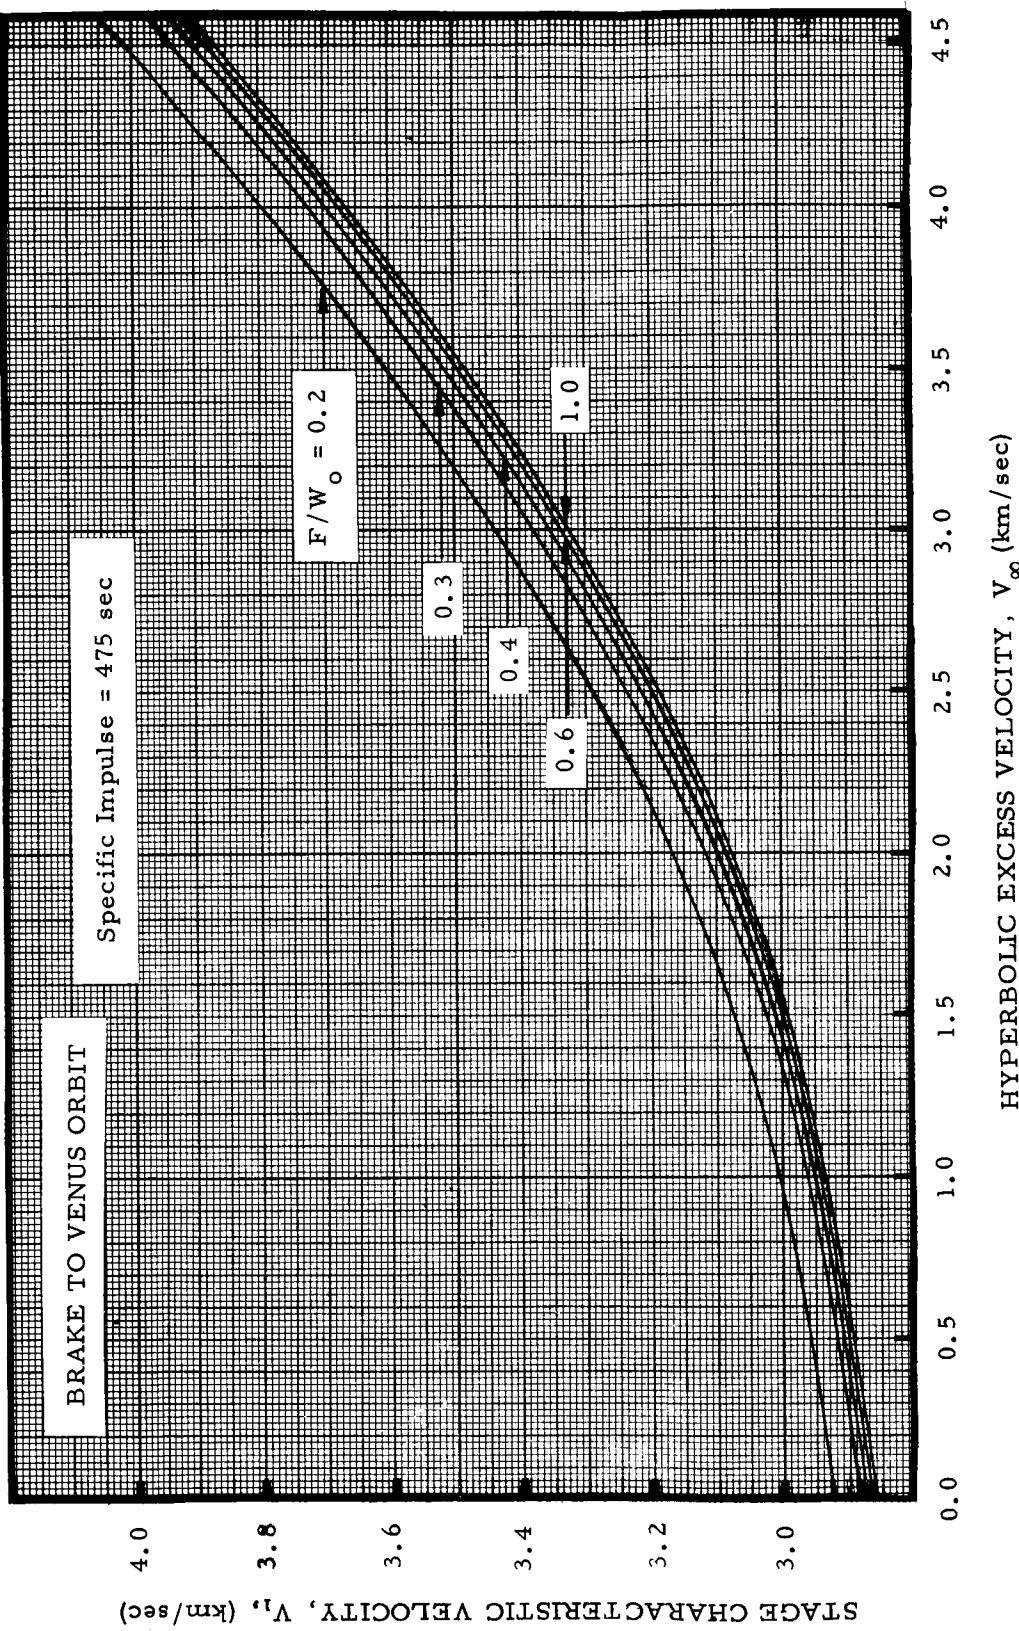


FIGURE 4a. CHARACTERISTIC VELOCITY, V_1 , (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 475 SECONDS

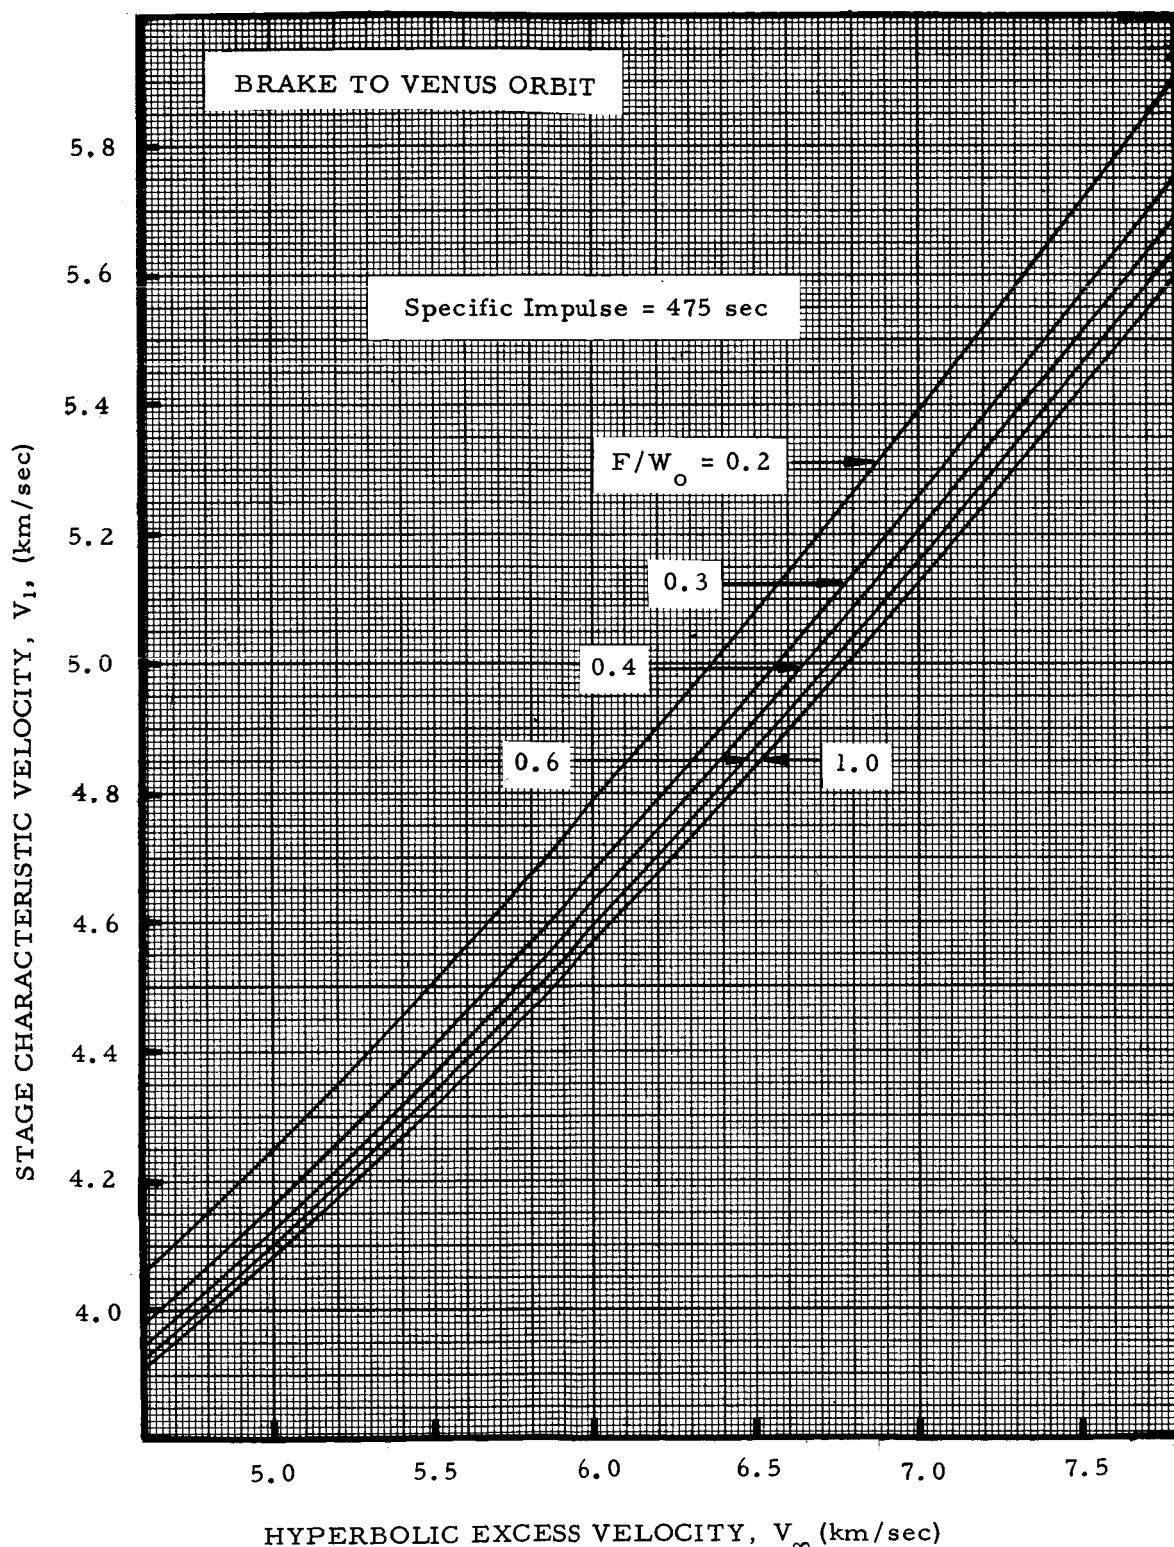


FIGURE 4b. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 475 SECONDS

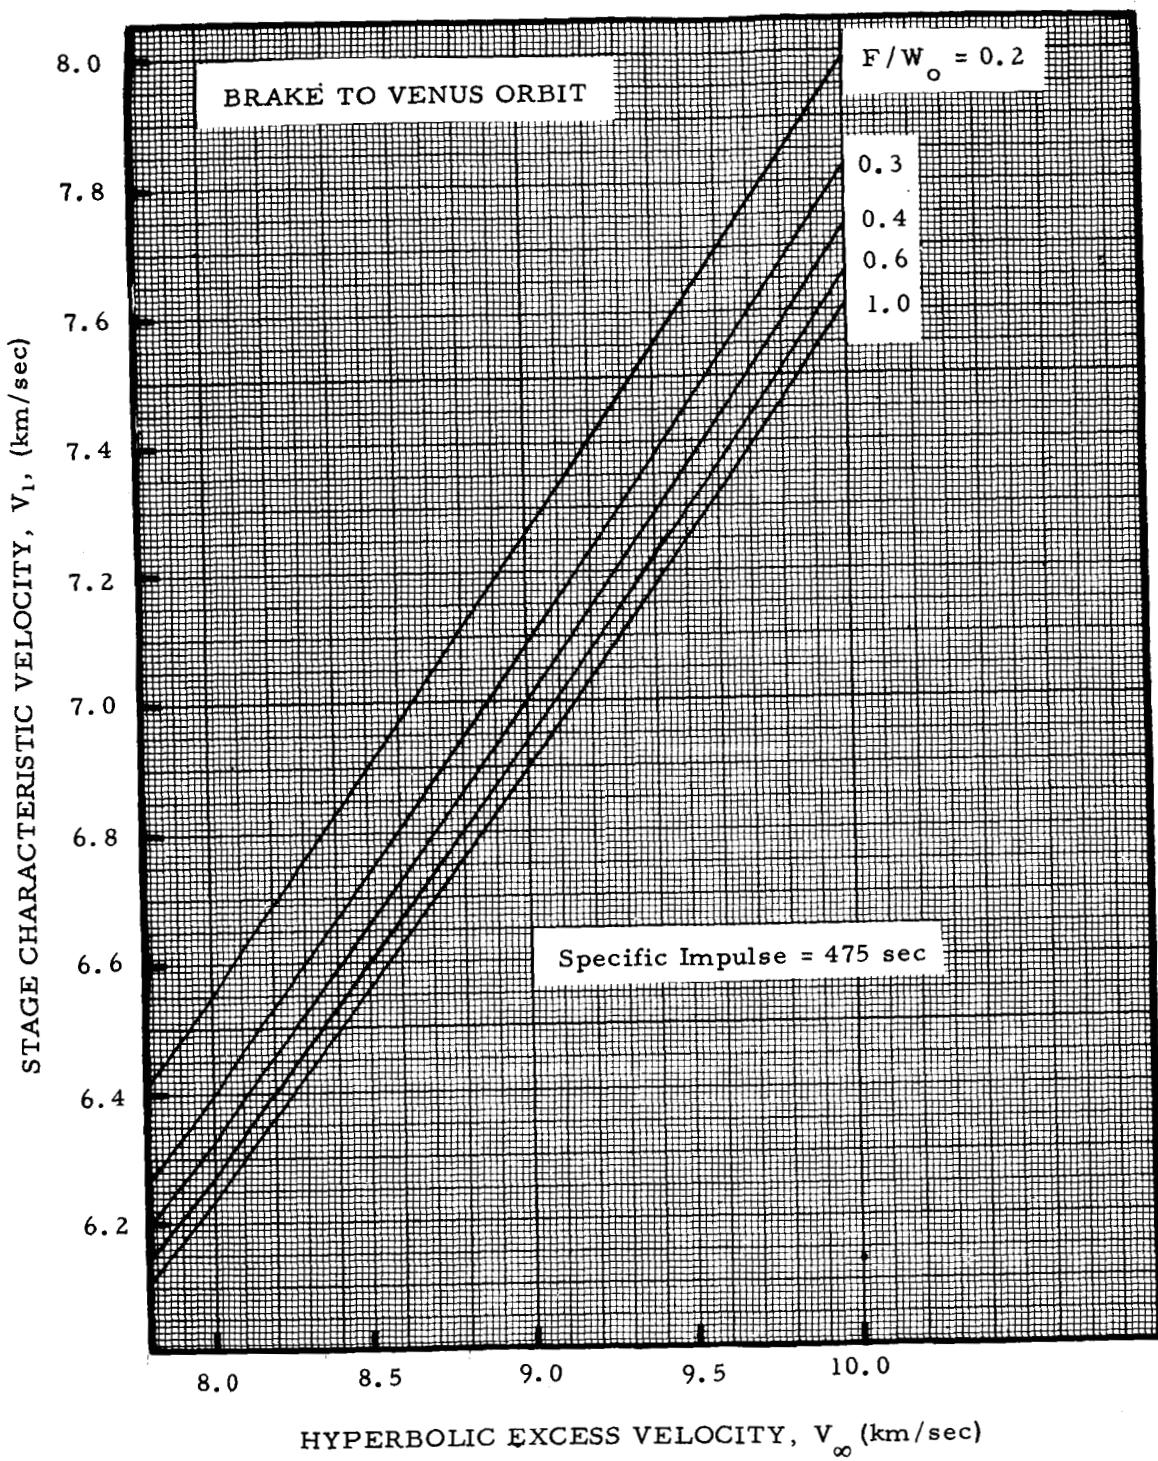


FIGURE 4c. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 475 SECONDS

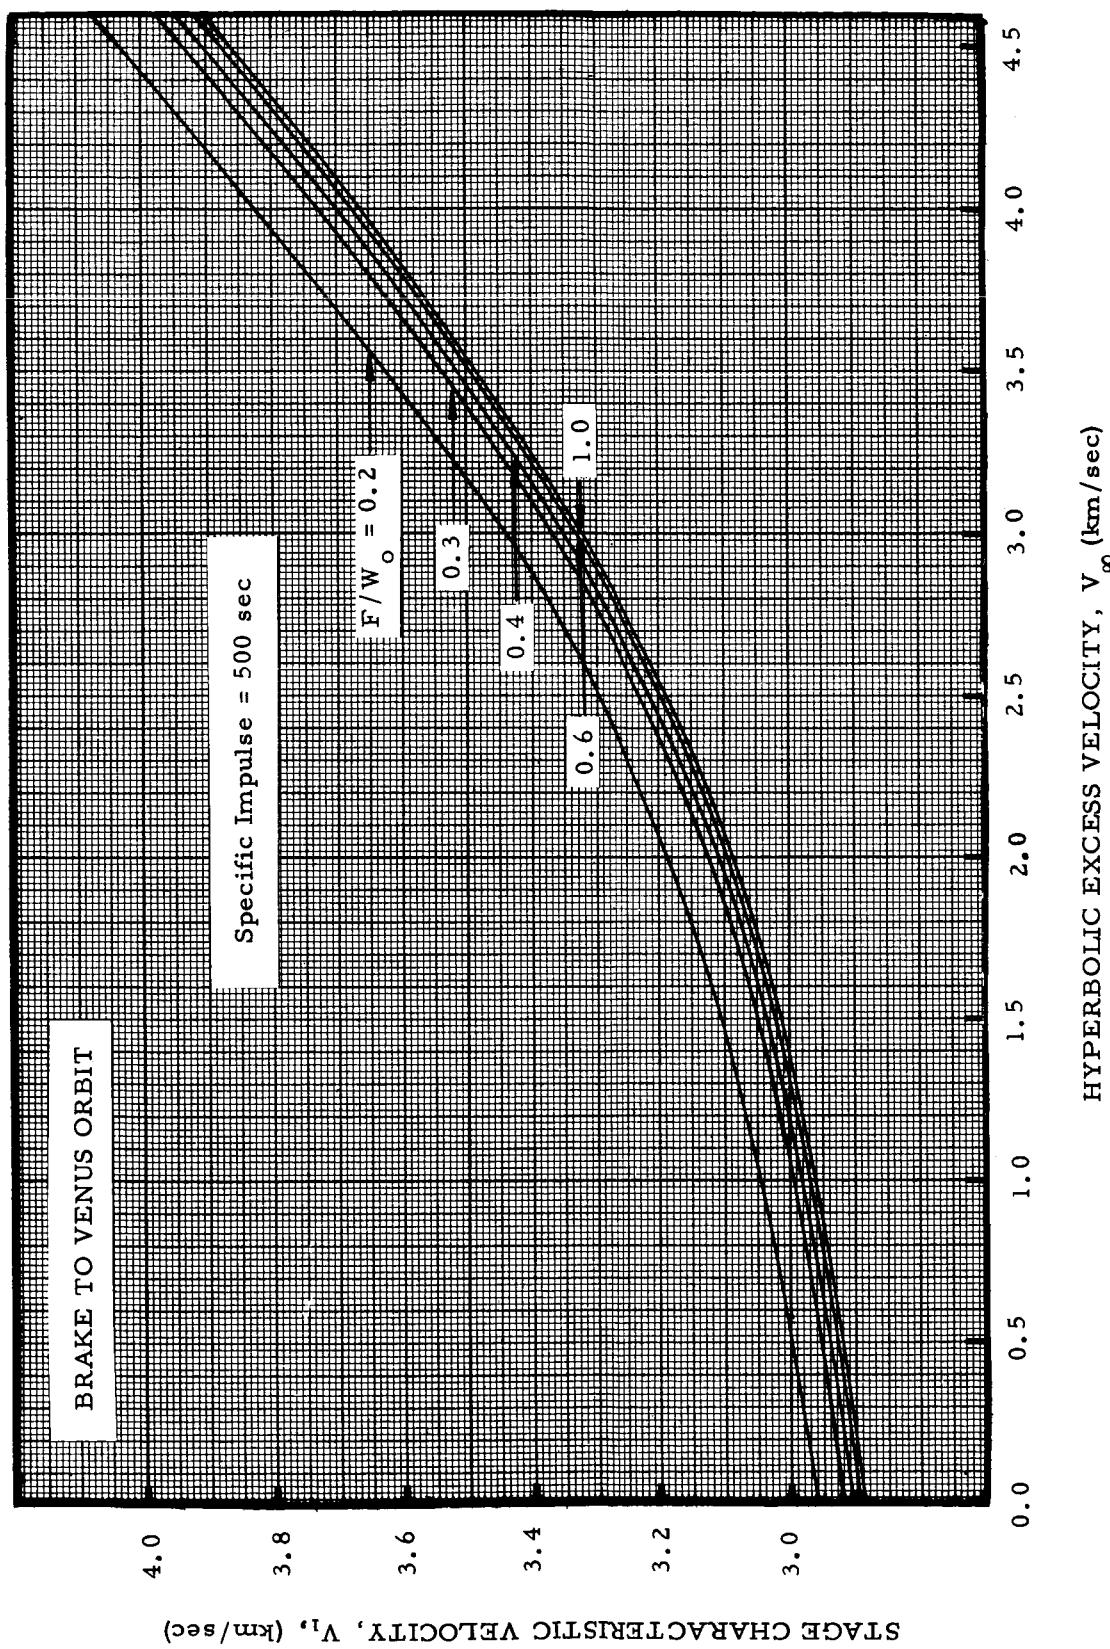


FIGURE 5a. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 500 SECONDS

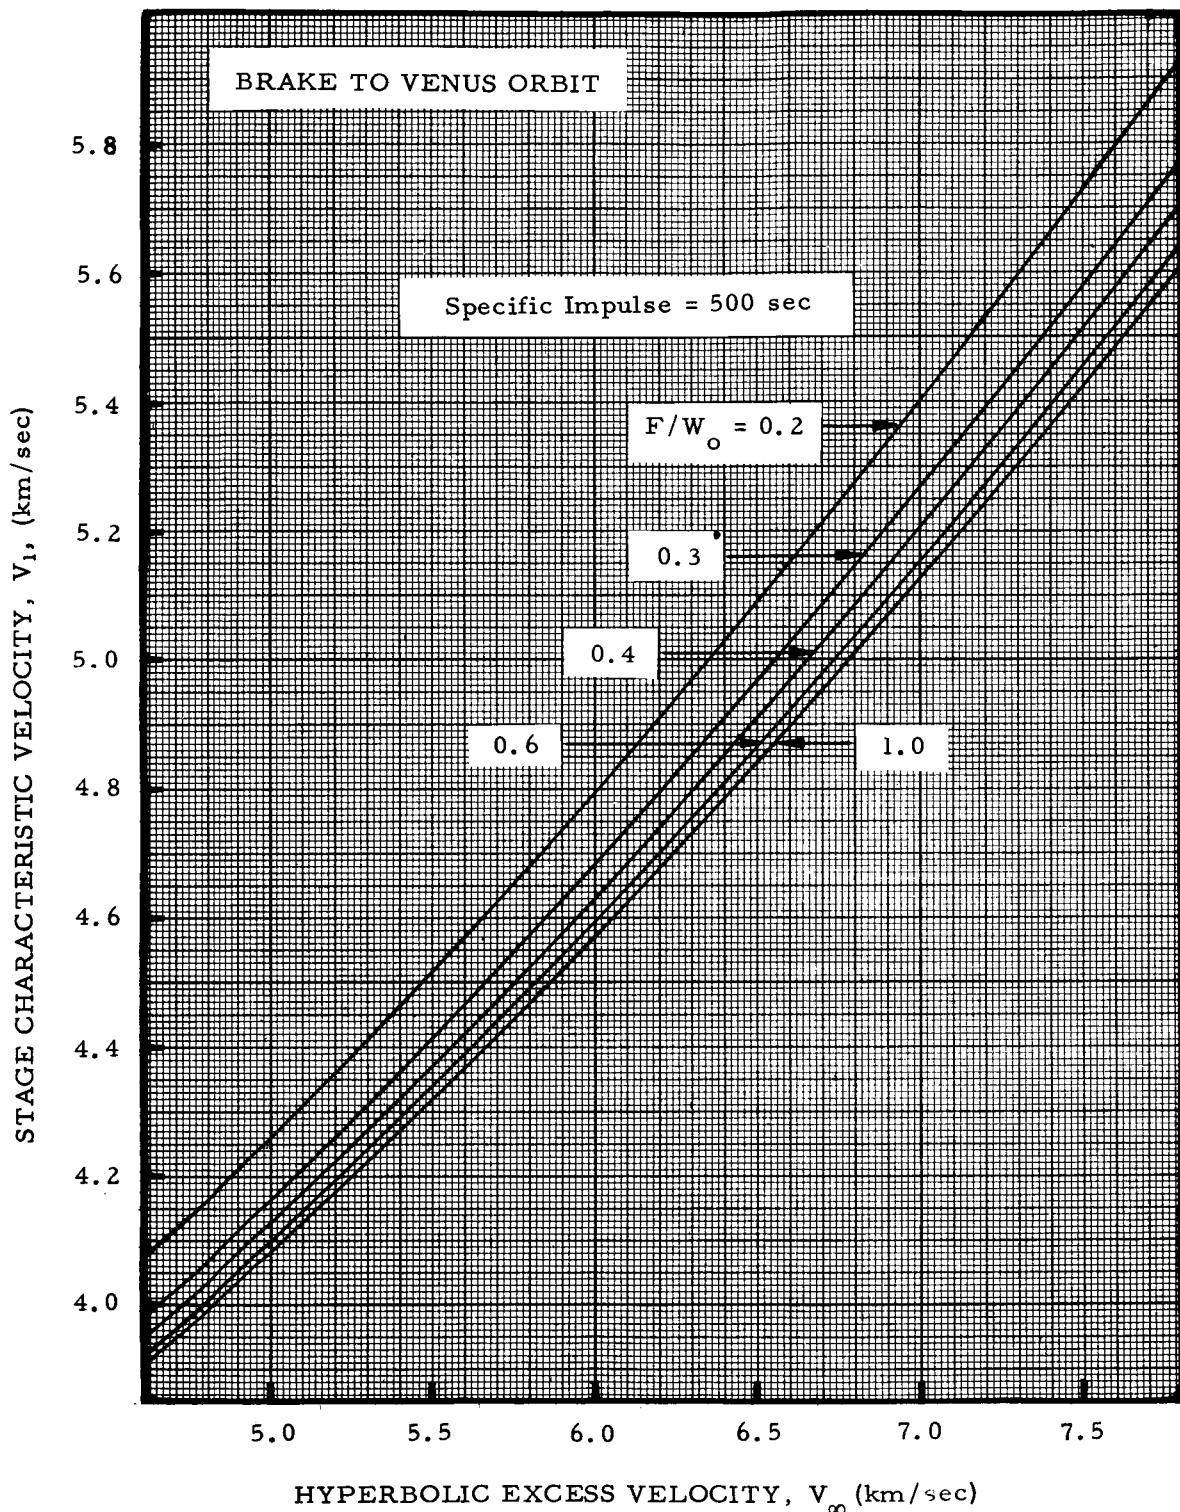


FIGURE 5b. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 500 SECONDS

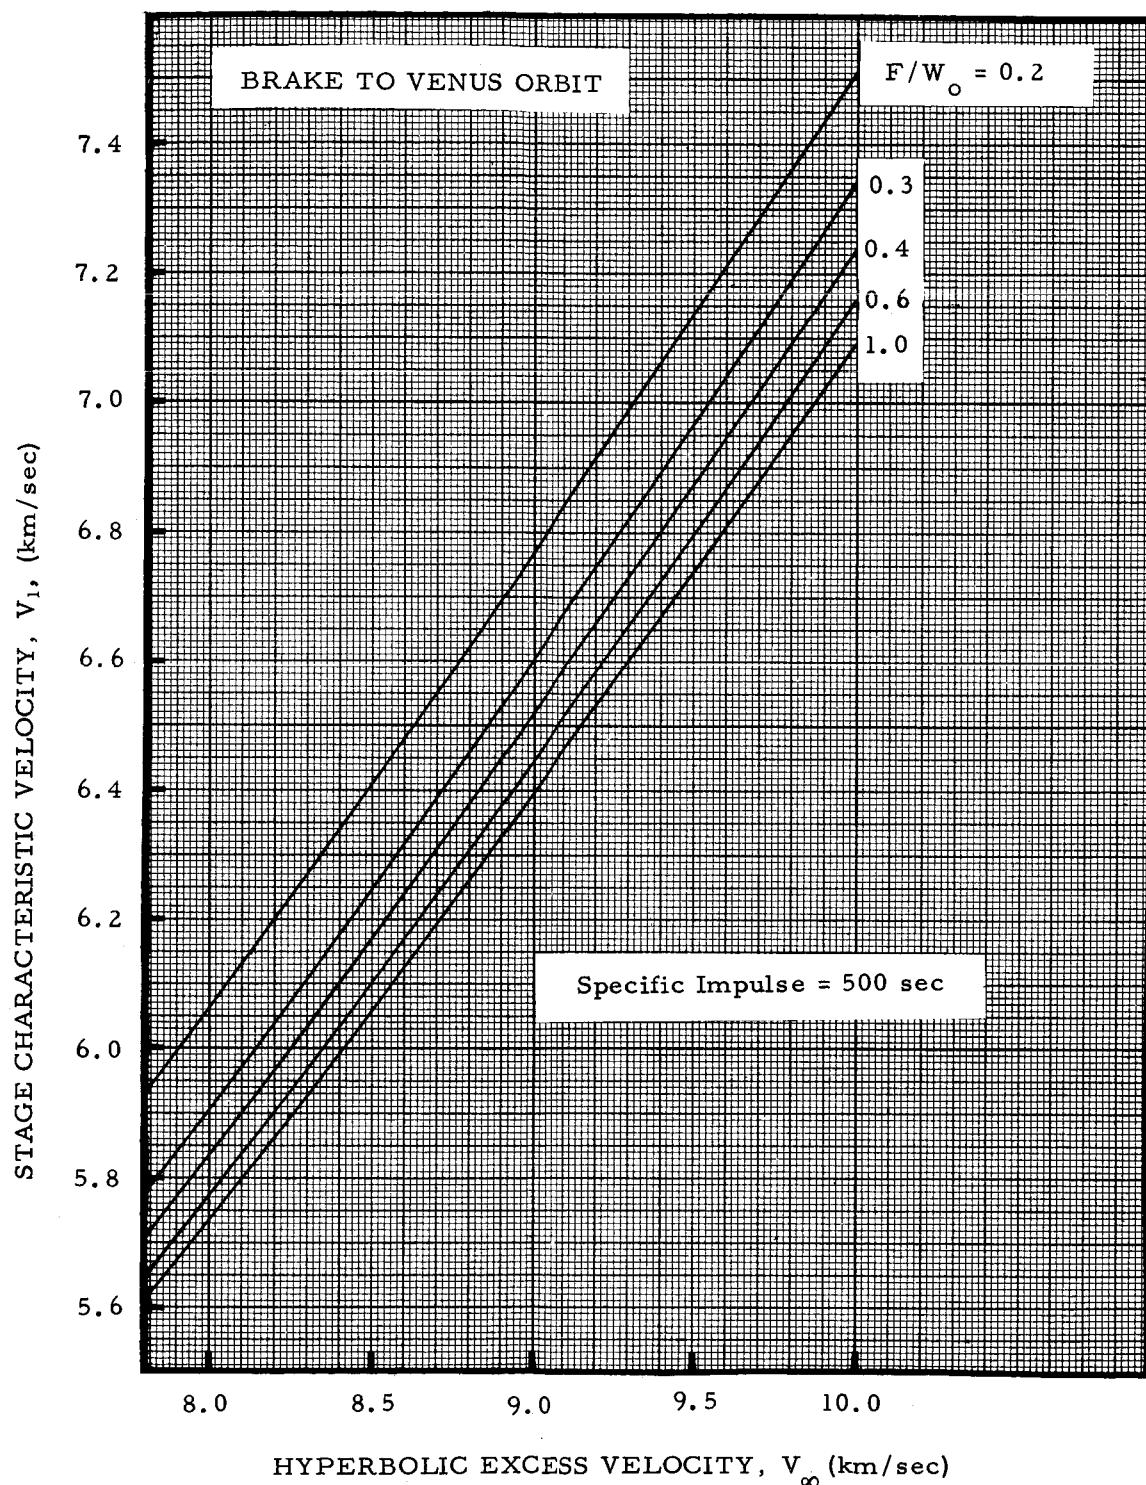


FIGURE 5c. CHARACTERISTIC VELOCITY, V_1 (km/sec), VERSUS HYPERBOLIC EXCESS VELOCITY, V_∞ (km/sec), WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER FOR A CONSTANT SPECIFIC IMPULSE OF 500 SECONDS

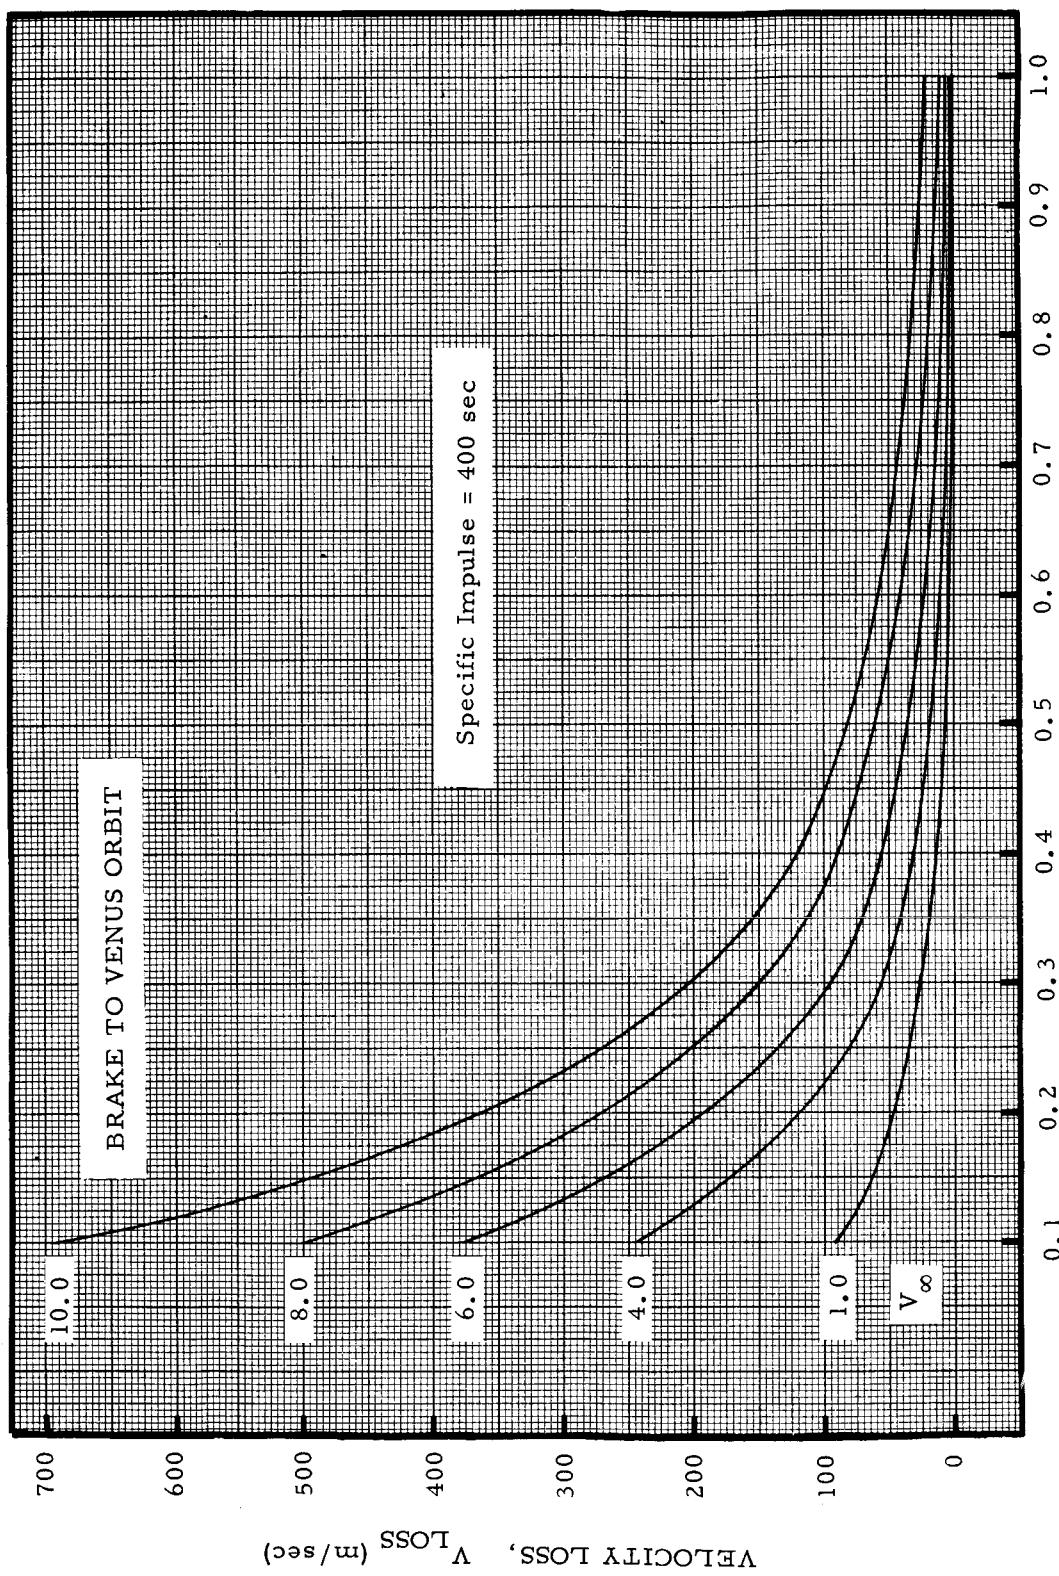


FIGURE 6. VELOCITY LOSS (m/sec) DUE TO GRAVITY VERSUS THRUST-TO-WEIGHT RATIO WITH HYPERBOLIC EXCESS VELOCITY (km/sec) AS A PARAMETER
THRUST-TO-WEIGHT RATIO, F/W_0

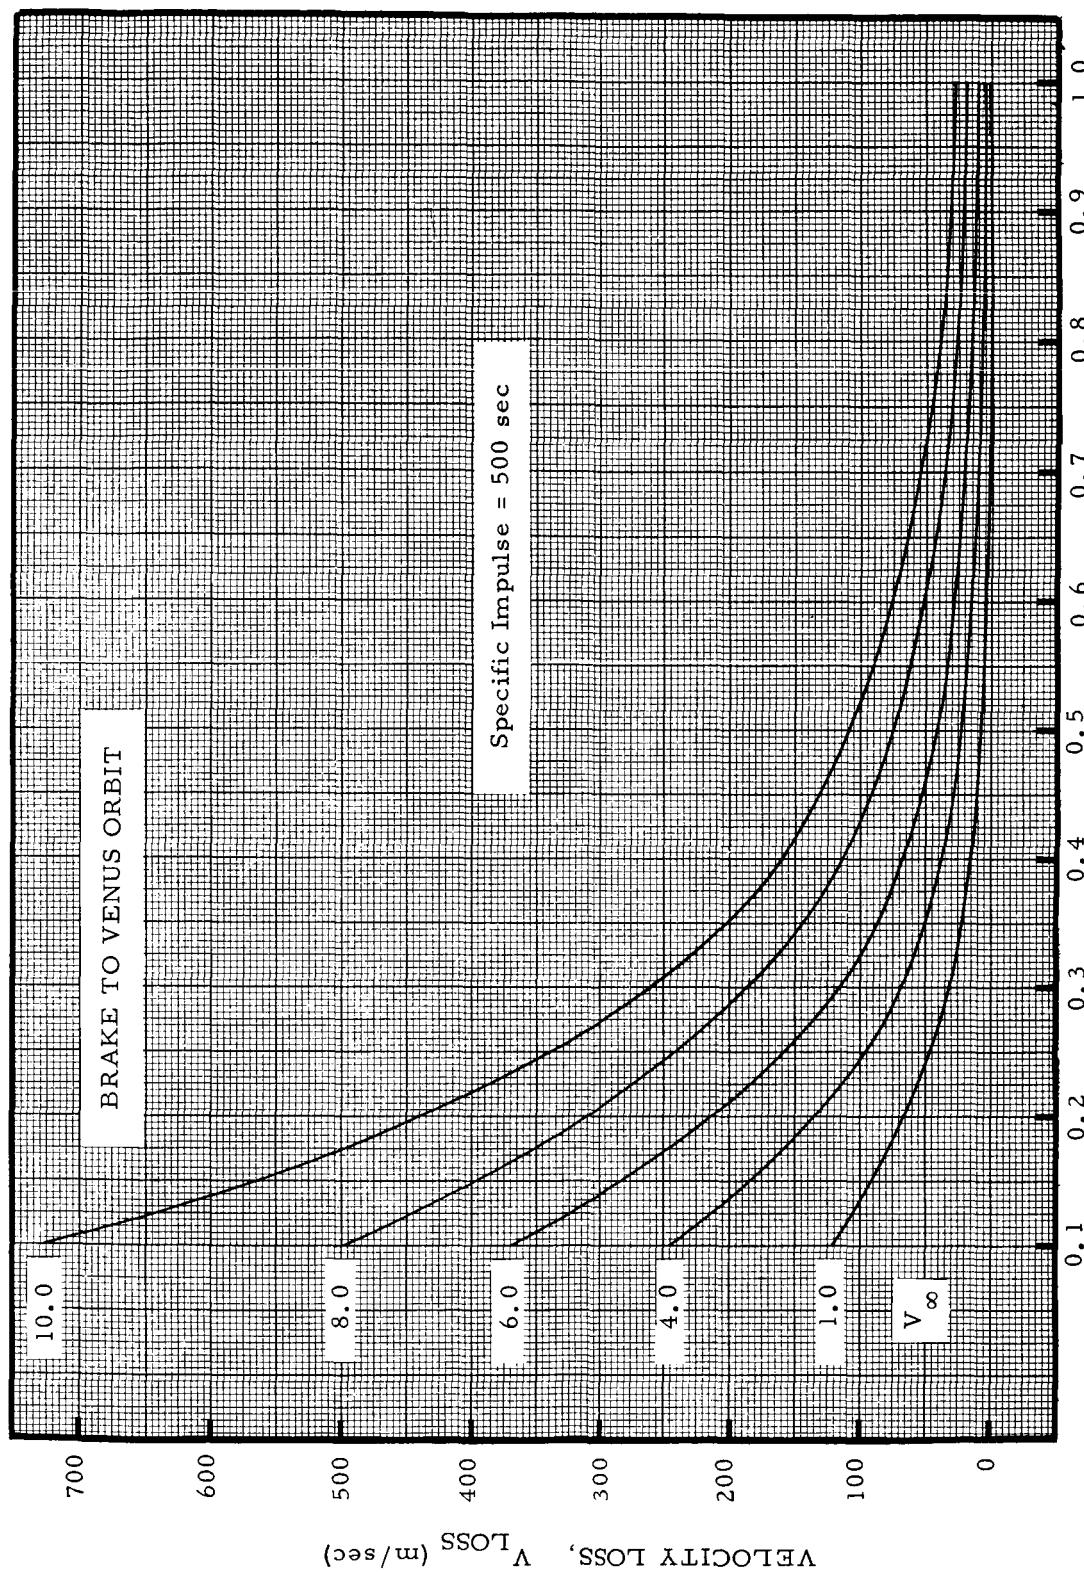


FIGURE 7. VELOCITY LOSS (m/sec) DUE TO GRAVITY VERSUS THRUST-TO-WEIGHT RATIO WITH HYPERBOLIC EXCESS VELOCITY (km/sec) AS A PARAMETER

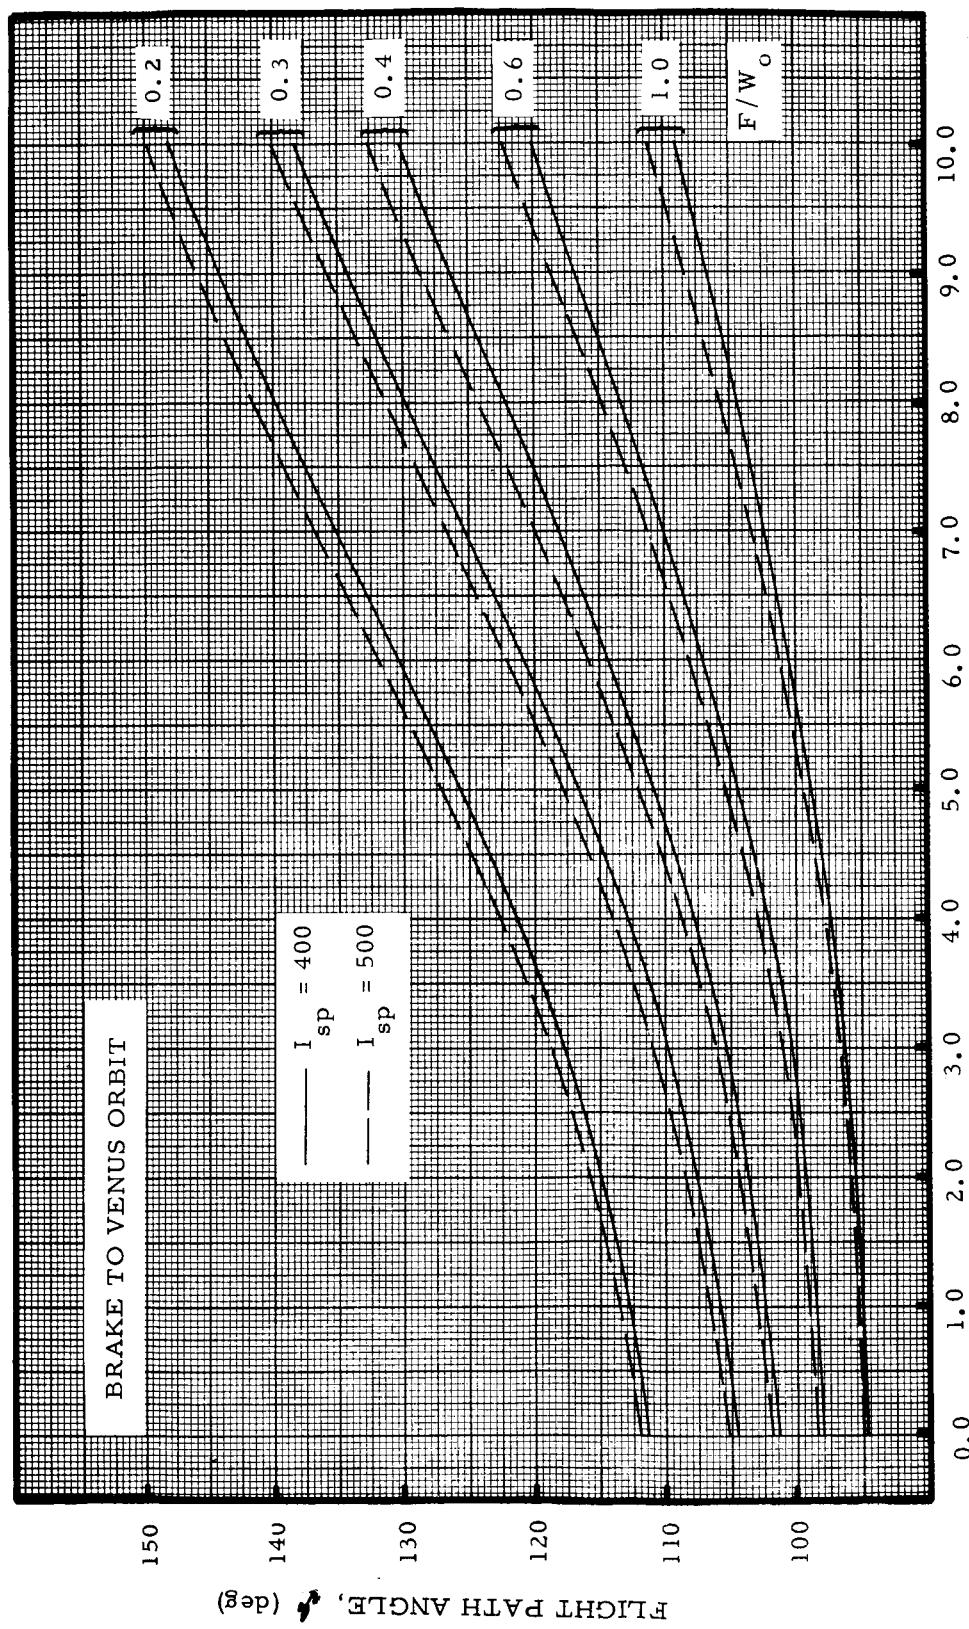


FIGURE 8. FLIGHT PATH ANGLE (deg) VERSUS HYPERBOLIC EXCESS VELOCITY (km/sec) WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER

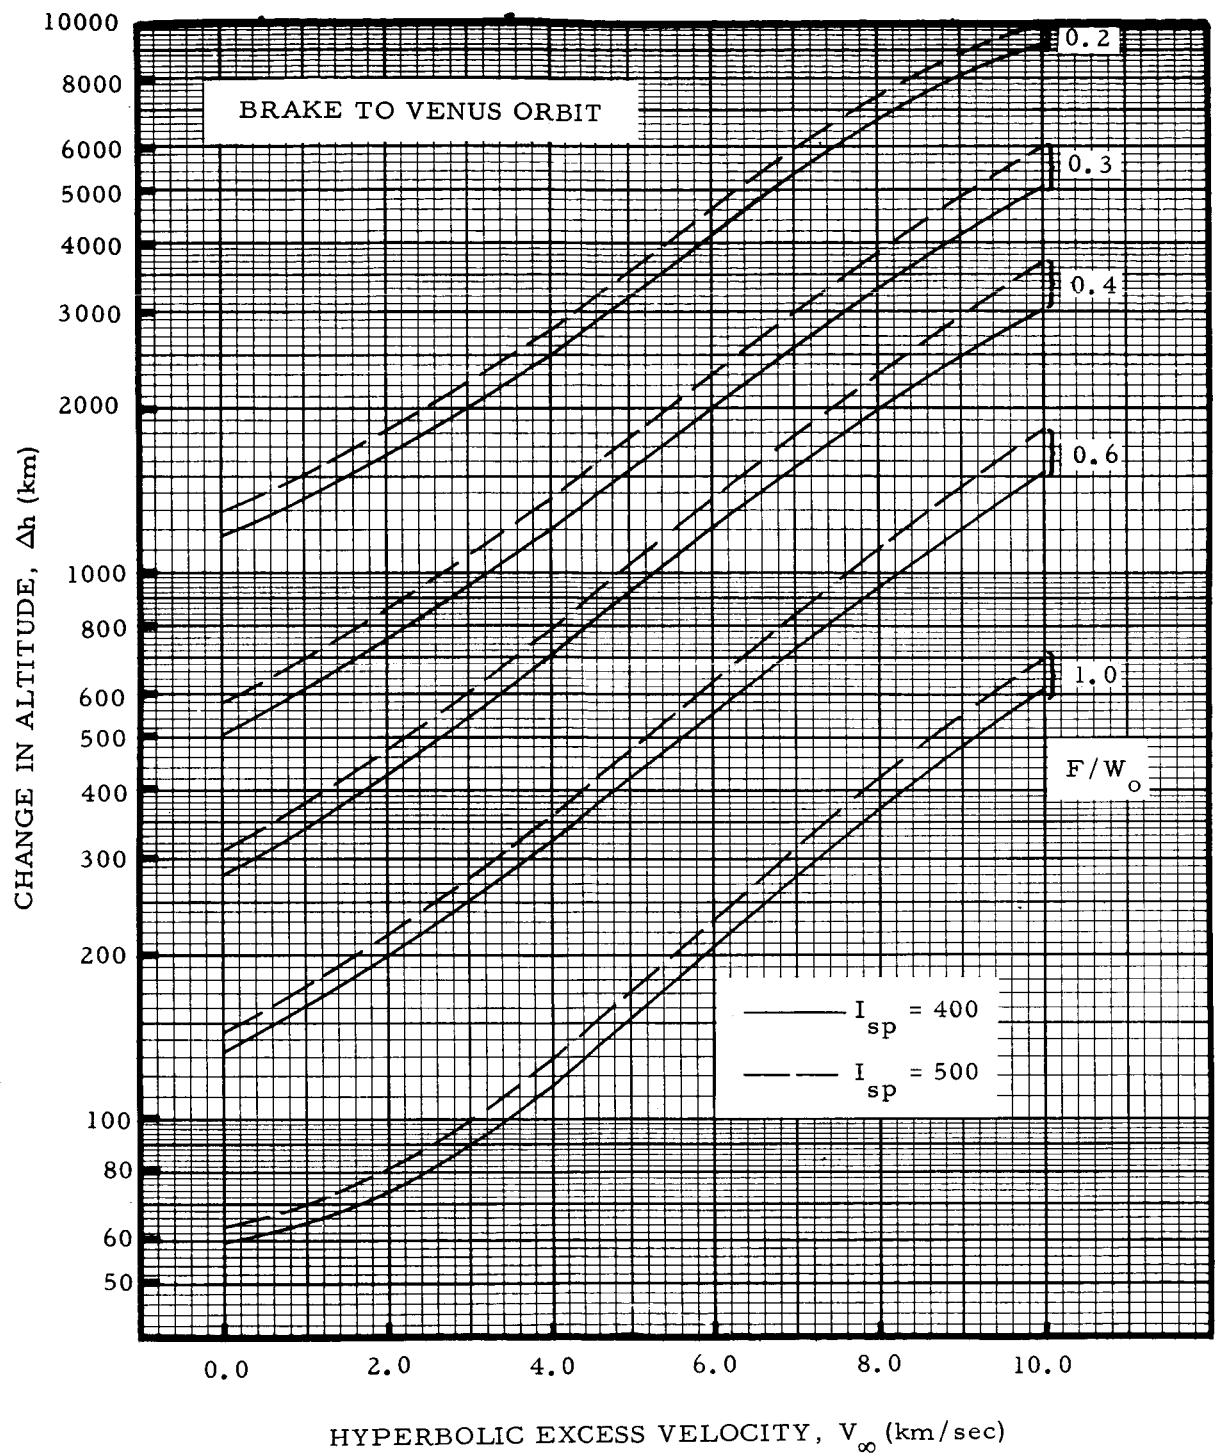


FIGURE 9. CHANGE IN ALTITUDE (km) VERSUS HYPERBOLIC EXCESS VELOCITY (km/sec) WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER

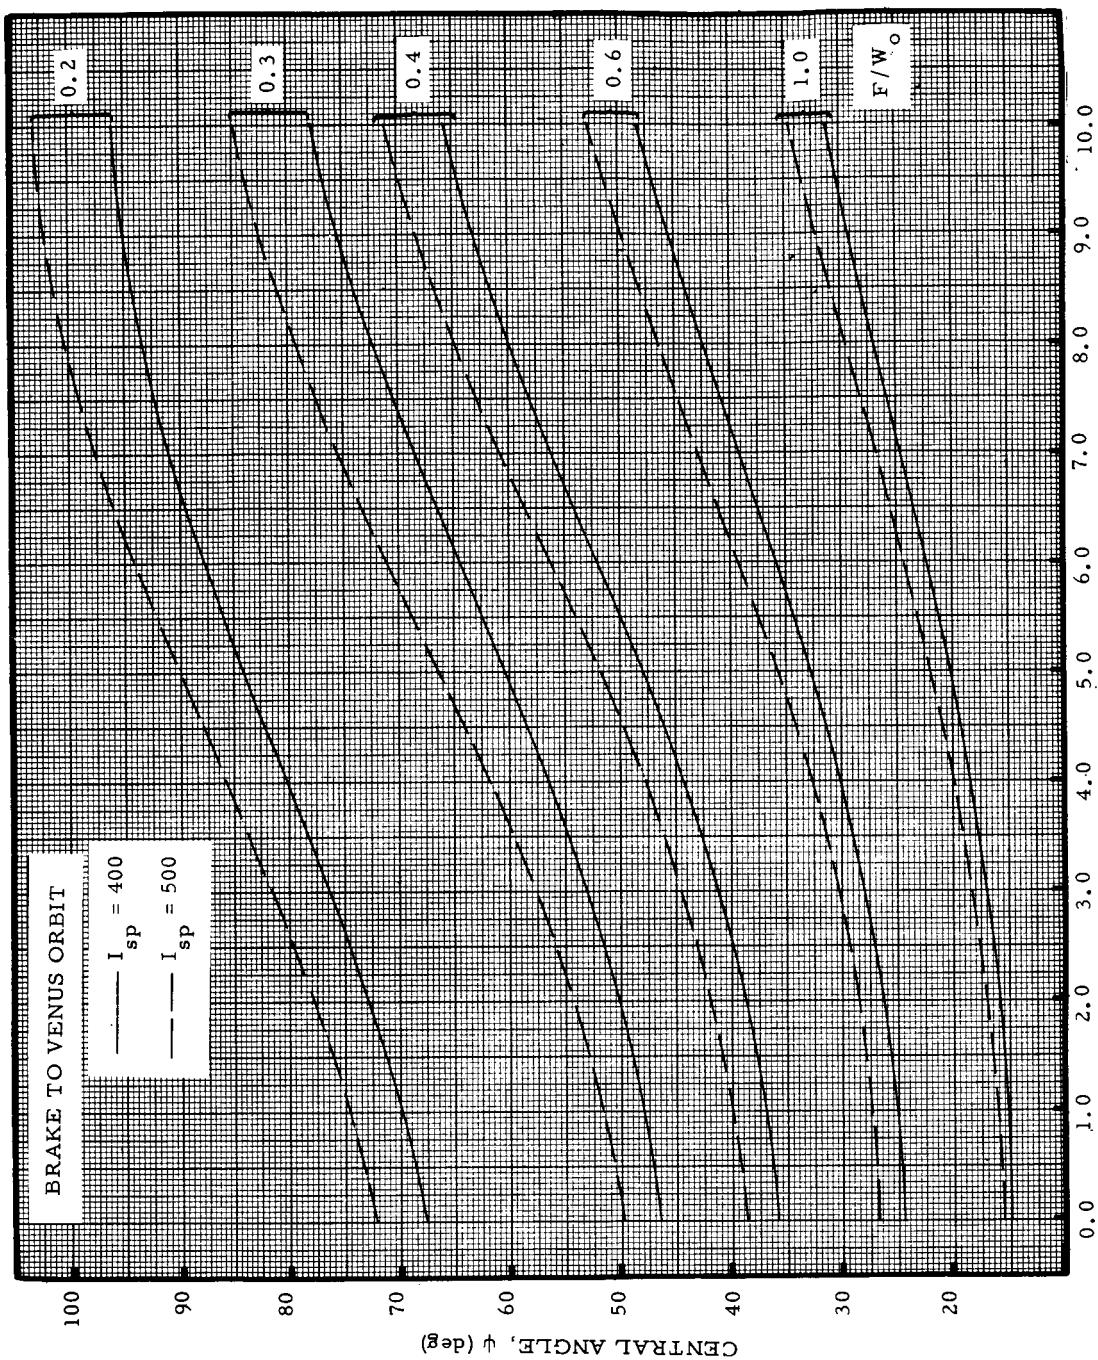


FIGURE 10. CENTRAL ANGLE (deg) VERSUS HYPERBOLIC EXCESS VELOCITY
(km/sec) WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER

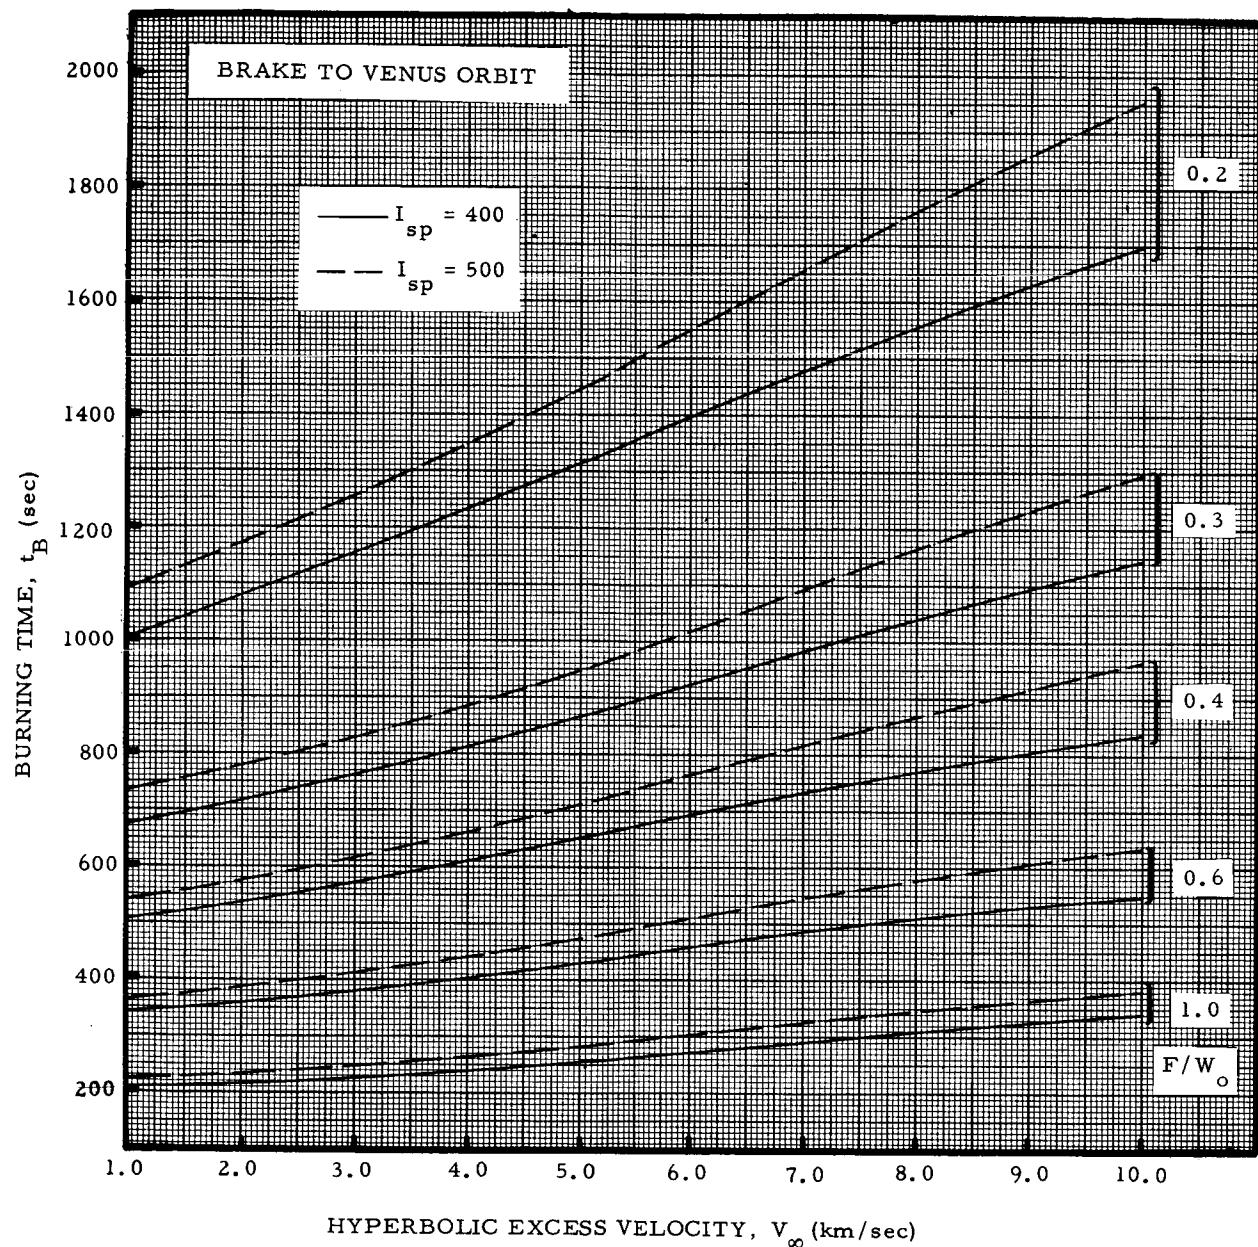


FIGURE 11. BURNING TIME (sec) VERSUS HYPERBOLIC EXCESS VELOCITY (km/sec) WITH THRUST-TO-WEIGHT RATIO AS A PARAMETER

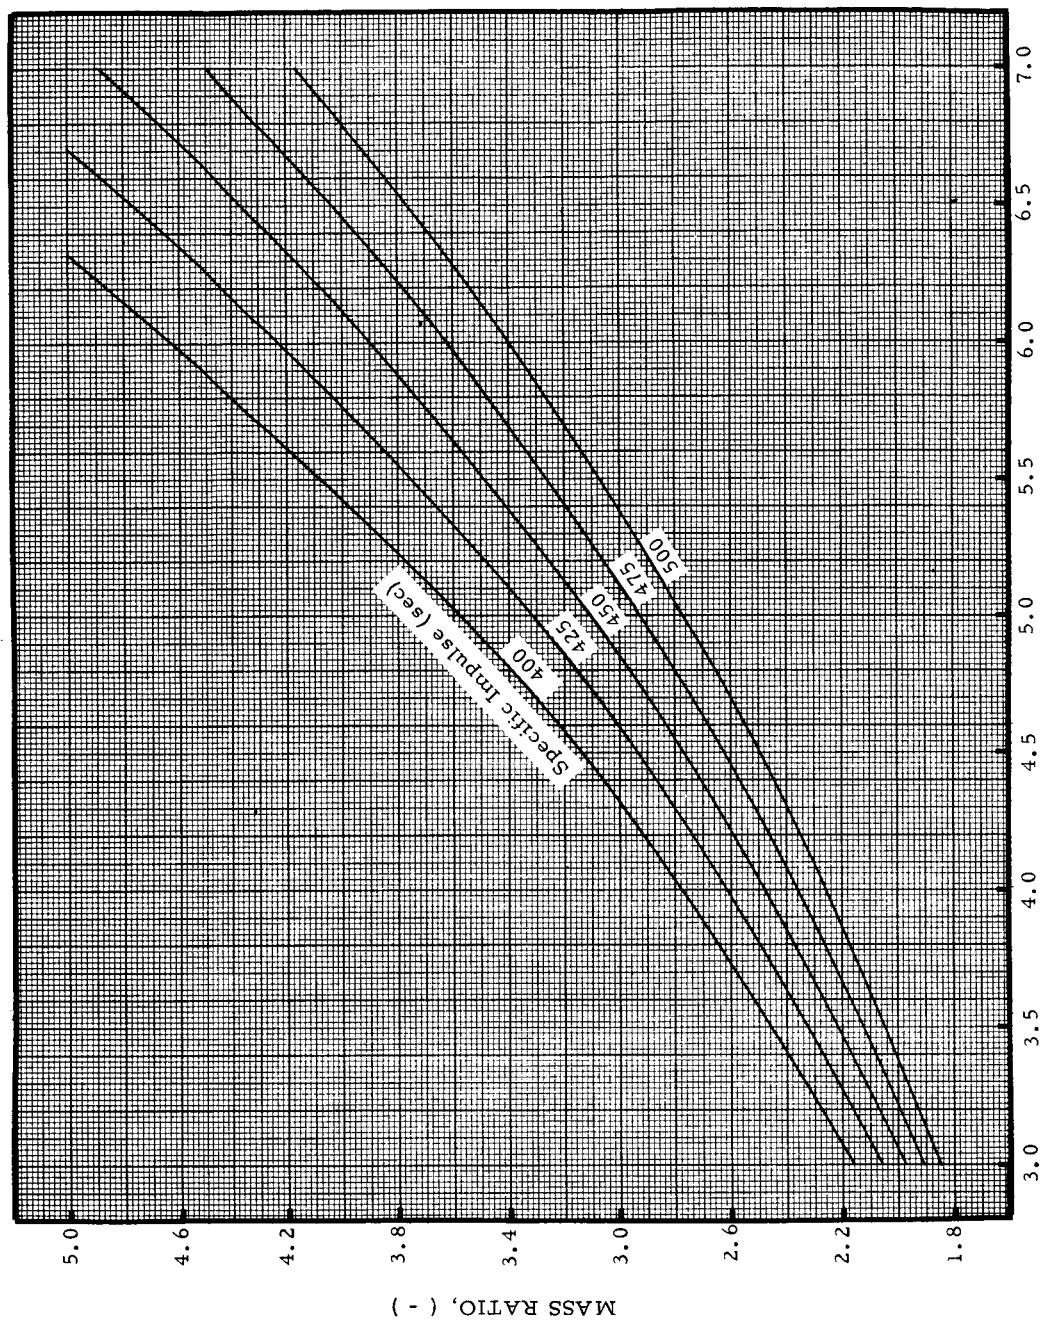


FIGURE 12. MASS RATIO VERSUS CHARACTERISTIC VELOCITY (km/sec)
WITH SPECIFIC IMPULSE AS A PARAMETER

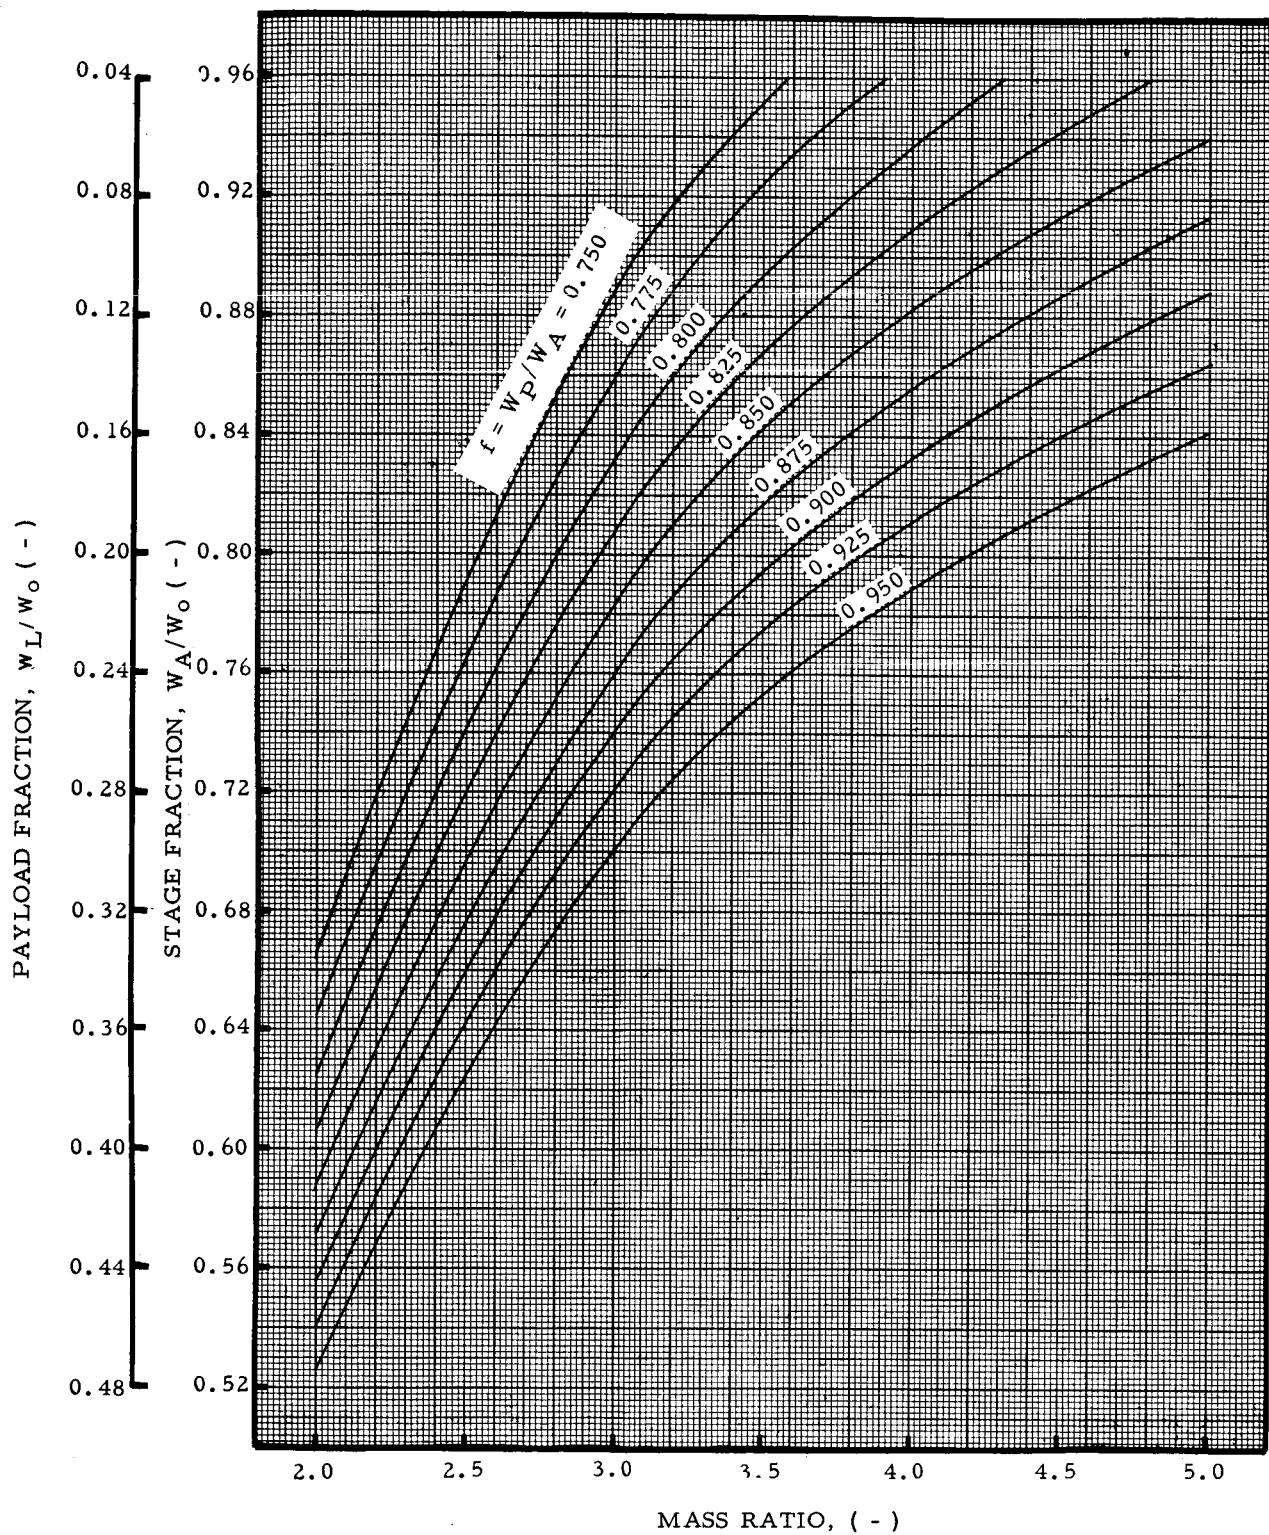


FIGURE 13. PAYLOAD FRACTION AND STAGE FRACTION VERSUS
MASS RATIO WITH STAGE PROPELLANT MASS FRACTION
AS A PARAMETER

BIBLIOGRAPHY

Clarke, Victor C. Jr., A Summary of the Characteristics of Ballistic Interplanetary Trajectories, 1962-1977. Jet Propulsion Laboratory, California Institute of Technology, Pasadena, California, Technical Report No. 32-209, NASA Contract No. 7-100, January 15, 1962.

Dobson, Wilbur F., Mackay, John S. and Huff, Vearl N., Starting Conditions for Nonoscillatory Low-Thrust Planet-Escape Trajectories. NASA TN D-1410, August 1962.

Ehricke, Krafft A., Space Flight Principles of Guided Missiles Design. (Edited by Grayson Merrill), Princeton, New Jersey, D. Van Nostrand Company, Inc., 1960.

Melbourne, W. G., Richardson, D. E. and Sauer, C. G., Interplanetary Trajectory Optimization with Power-Limited Propulsion Systems. Jet Propulsion Laboratory, California Institute of Technology, Pasadena, California, Technical Report No. 32-173, NASA Contract No. NAS 7-100, February 26, 1962.

Ross, S., et. al., A Study of Interplanetary Transportation Systems. Lockheed Missiles and Space Division, Final Report No. 3-17-62-1, Contract NAS 8-2469, June 2, 1962.

Soviet Press (February 12 - March 3, 1961), Destination--Venus (Astronautics Information Translation No. 20) Compiled and Translated by Joseph L. Zygielbaum under NASA Contract NASw-6. Jet Propulsion Laboratory, California Institute of Technology, Pasadena, California, April 1, 1961.

Stafford, Walter H., Working Graphs for Artificial Venusian Satellites. MSFC Report IN-P&VE-F-62-8, August 17, 1962.

Stafford, Walter H. and Catalfamo, Carmen R., Performance Analysis of High-Energy Chemical Stages for Interplanetary Missions, Part I: Departure from Earth Orbit. MSFC Report MTP-P&VE-F-63-7, March 22, 1963.

APPROVAL

MTP-P&VE-F-63-9

PERFORMANCE ANALYSIS OF HIGH-ENERGY CHEMICAL
STAGES FOR INTERPLANETARY MISSIONS

PART II

BRAKE TO VENUS ORBIT

By Walter H. Stafford and Sam H. Harlin

The information in this report has been reviewed for security classification. Review of any information concerning Department of Defense or Atomic Energy Commission programs has been made by the MSFC Security Classification Officer. This report, in its entirety, has been determined to be unclassified.

James W. Russell
J. W. RUSSELL
Chief, Orbital and Re-entry Flight Unit

A. W. Galzerano
A. W. GALZERANO
Acting Chief, Flight Operations Section

Erich F. Goerner
ERICH F. GOERNER
Chief, Advanced Flight Systems Branch

W. A. Mrazek
W. A. MRAZEK
Director, Propulsion and Vehicle Engineering Division

DISTRIBUTION

M - DIR
Dr. von Braun

M - AERO-S
Mr. de Fries

M - DEP-R&D
Dr. Rees

M - ASTR-DIR
Dr. Haeussermann

M - CP-DIR
Mr. Maus

M - ASTR-A
Mr. Digesu

M - AERO-DIR
Dr. Geissler

M - ASTR-M
Mr. Boehm
Mr. Pfaff

M - AERO-TS
Mr. Baussus
Dr. Heybey
Dr. Sperling

M - COMP-DIR
Dr. Hoelzer
Mr. Bradshaw

M - AERO-PS
Mr. Braunlich
Mr. Schmidt

M - FPO
Mr. Koelle
Mr. Williams
Dr. Ruppe

M - AERO-A
Mr. Dahm
Mr. Struck
Mr. Linsley

M - MS-H
Mr. Akens

M - AERO-D
Mr. Horn
Mr. Thomae
Mr. Callaway

M - MS-IP
Mr. Remer

M - MS-IPL
Miss Robertson (8)

M - AERO-F
Dr. Speer
Mr. Kurtz

M - P&VE-DIR
Dr. Mrazek
Mr. Weidner
Mr. Hellebrand

M - AERO-P
Dr. Hoelker
Mr. Dearman

M - P&VE-V
Mr. Palaoro

DISTRIBUTION (Concluded)

M - P& VE-M Dr. Lucas	M - P& VE-E Mr. Schulze
M - P& VE-F Mr. Goerner Mr. Barker Mr. Swanson Dr. Krause Mr. Burns	M - P& VE-ADMP M - RP-DIR Dr. Stuhlinger Mr. Heller
M - P& VE-FN Mr. Jordan Mr. Harris Mr. Saxton	M - RP Mr. Snoddy Mr. Prescott Mr. Naumann Mr. Fields
M - P& VE-FF Mr. Galzerano Mr. Fellenz Mr. Kromis (5) Mr. Russell Mr. Stafford (25)	M - SAT-DIR Dr. Lange M - HME-P Mr. Knox
M - P& VE-FS Mr. Neighbors Mr. Johns Mr. Orillion Mr. Schwartz Mr. Laue	M - PAT Scientific and Technical Information Facility Attn: NASA Representatives (2) (S-AK/RKT) P. O. Box 5700 Bethesda, Maryland
M - P& VE-P Mr. Paul Mr. Head	
M - P& VE-S Mr. Kroll Dr. Glaser	
M - P& VE-SA Mr. Blumrich Mr. Engler	